

La notice d'installation ne remplace pas les réglementations locales et (inter)nationales des installations électriques.

- Le produit doit être installé par un électricien professionnel en suivant les codes électriques usuels et appropriés et les instructions fournies par le fournisseur, pour éviter tout risque de combustion ou de choc électrique
- Avant l'installation, la maintenance ou le nettoyage du produit, toujours couper l'alimentation au panneau principal

CONSIGNES DE SÉCURITÉ

Pour faciliter le processus d'installation et assurer les performances du produit, effectuer la procédure d'installation avec les règles de sécurité suivantes :

- Déballez soigneusement le produit et s'assurer de l'absence de dommage. Si le produit est endommagé, le retourner au fournisseur.
- Ne pas engager de réparation soi-même sous peine d'annuler la garantie. Contacter le revendeur local pour obtenir une assistance technique.
- À conserver à température ambiante : -25 °C à +45 °C

DÉPANNAGE

Si absence de lumière :

- Vérifier que le produit et ses accessoires sont correctement installés.
- Vérifier que le produit est bien sous tension.

Si le produit ne fonctionne toujours pas, contacter le fournisseur local pour obtenir une assistance technique. Ne jamais réparer par soi-même au risque de perdre la garantie.


NETTOYAGE/MAINTENANCE

Afin d'optimiser la lumière, nettoyer les optiques ainsi que les matériaux de réflexion une fois le produit mis hors tension et après avoir attendu son refroidissement.

- Ne jamais utiliser de nettoyant chimique. Élément nettoyable par jet d'eau ou au savon moussant.
- Ne pas couvrir avec un matériau isolant thermique

CONSIGNES D'UTILISATION

- Ne pas allumer le produit lorsque le ruban est enroulé autour du touret. Dérouler l'intégralité du ruban LED avant utilisation.
- Tension d'utilisation 220-240 V. Brancher le produit sur une installation électrique stable, protégée des surtensions et fuites.
- Ne pas procéder à des opérations de maintenance ou autres manipulations lorsque le produit est sous tension. Risque de choc électrique.
- Ne pas connecter plus de 50 mètres de ruban LED à la suite.
- Ne pas placer le redresseur 230 V dans un endroit humide ni dans l'eau.
- Ne pas installer le produit dans un environnement inflammable ou explosif.
- Ne pas fixer le ruban LED avec un support métallique.
- Ne pas plier ou tordre le ruban d'un diamètre de courbure inférieur à 8cm
- Ne pas installer le ruban LED dans un environnement confiné.
- Ne pas recouvrir ni envelopper le ruban LED.
- Ne pas écraser ou exercer de pression sur le ruban lors de son utilisation.

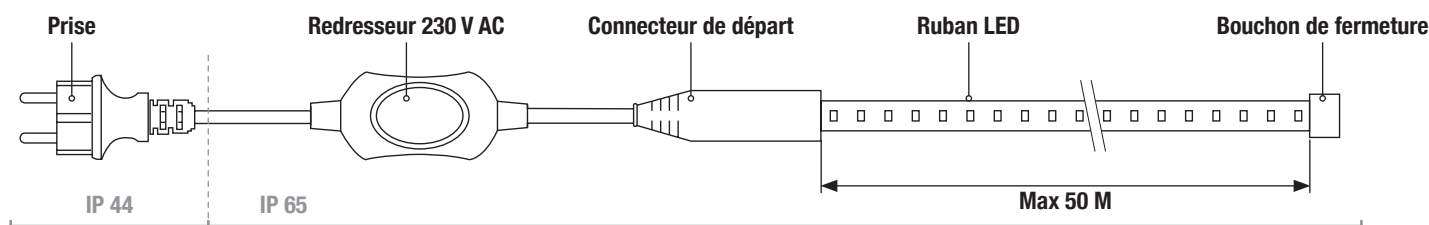


NOTICE D'INSTALLATION

Dérouler l'intégralité du ruban LED puis brancher la prise du produit sur secteur. **DANS LE CAS D'UNE COUPURE DU RUBAN LED, L'ÉTANCHÉITÉ DE LA CONNEXION ÉLECTRIQUE N'EST PLUS ASSURÉE.**

Le ruban LED est sécable tous les 1 mètre. Pour couper le ruban LED, vérifiez impérativement que le produit est hors tension.

- 1/ Couper proprement le ruban à l'endroit indiqué (pictogramme ciseau tous les mètres).
- 2/ Enfoncer le connecteur broche en plaçant les pointes dans les 2 fils conducteurs du ruban LED.
- 3/ S'assurer que le connecteur soit fixé dans le prolongement du ruban LED.
- 4/ Insérer l'autre extrémité de la broche dans le connecteur du redresseur 230 V fourni avec le kit d'alimentation. Utiliser la colle fournie pour sceller la connexion.
- 5/ S'assurer du bon sens et du bon maintien de la nouvelle connexion.
- 6/ Ajouter le bouchon fin de ligne à l'extrémité du ruban LED et le connecter fermement à l'aide de la colle fournie.

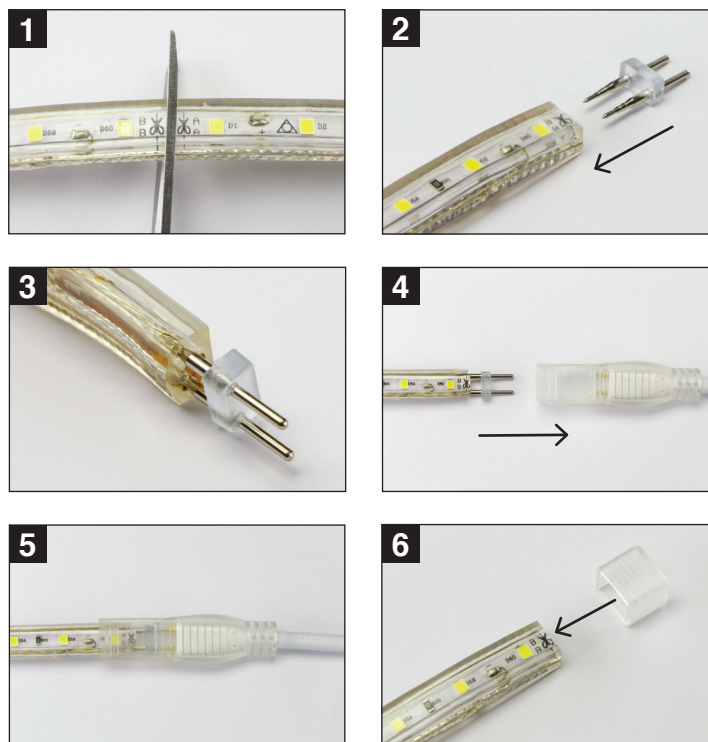

BIZLINE SAS PARIS - FRANCE

EMX 108 002

EN LED STRIP 230V 50 M

Accessories included : plastic drum, x 2 power supply kit

EMX

BY BIZLINE

The installation instruction does not superseeds local and (inter) national regulations for electrical installations

- The product must be installed by a professional electrician following applicable and appropriate electrical standards and the instructions provided by the supplier in order to avoid any risks of fire or electrical shock
- Before installation, maintenance or cleaning, always first turn off power to the circuit.

SAFETY INSTRUCTIONS

In order to facilitate the installation process and ensure product performance, follow the installation procedure according to the following safety rules:

- Carefully unpack the product and ensure there are no damages. Return the product to the supplier if damages are noticed
- Do not attempt to repair the product since doing so may void the warranty. Contact your local reseller for technical assistance.
- Keep at an ambient temperature of: -25 °C to +45 °C.

TROUBLESHOOTING

Absence of light:

- Check that the product and its accessories are correctly installed.
- Check if the power supply is connected.

If the product still does not work, contact the local retailer to obtain technical assistance. Do not attempt to repair the product, as doing so will void the warranty.


CLEANING/MAINTENANCE

To optimize lighting, clean optical components and aluminum ring which reflect the light regularly, once the power has been switched off and the product has cooled down.

- Never use chemical products for cleaning. Washability: use water jet or soapsuds.
- Do not cover with thermal insulation materials

INSTRUCTIONS

- Do not light the product when the tape is wrapped around the drum. Unroll the entire LED strip before use.
- Operating voltage 220-240 V. Connect the product to a stable electrical installation, protected from overvoltages and leaks.
- Do not carry out maintenance or other operations when the product is live. Risk of electric shock.
- Do not connect more than 50 meters of LED ribbon as a result.
- Do not place the 230V rectifier in a damp place or in water.
- Do not install the product in a flammable or explosive environment.
- Do not fix the LED strip with a metal bracket.
- Do not bend or twist the ribbon with a bending diameter less than 8cm
- Do not install the LED strip in a confined environment.
- Do not cover or wrap the LED strip.
- Do not crush or apply pressure to the tape during use.

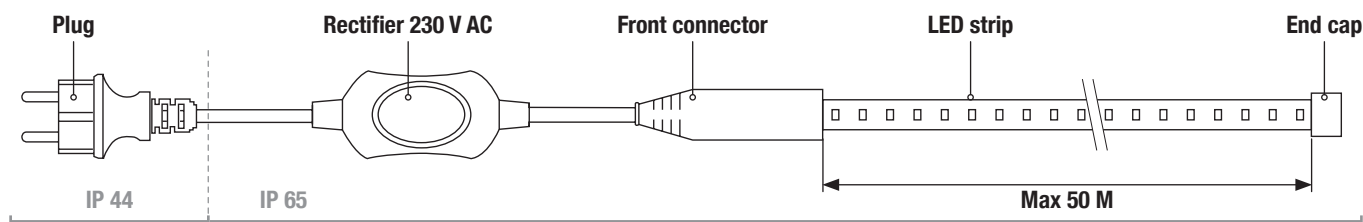


USER MANUAL

Unroll the entire LED strip and connect the power plug to the power supply. IN CASE OF A CUTTING OF THE LED STRIP, THE SEALING OF THE ELECTRICAL CONNECTION IS NO LONGER ENSURED.

The LED ribbon is scored every 1 meter. To cut the LED strip, make sure that the product is turned off.

- 1 / Cleanly cut the ribbon at the indicated place (symbol chisel every meter).
- 2 / Insert the pin connector by placing the points in the 2 conductive wires of the LED strip.
- 3 / Make sure that the pin connector is correctly attached as an extension of the LED strip.
- 4 / Insert the other end of the pin into the 230 V rectifier connector supplied with the power kit. Use the glue provided to seal the connection.
- 5 / Make sure that the new connection is correctly plugged and in the right direction.
- 6 / Add the end cap at the end of the LED strip and connect it firmly with the glue provided.

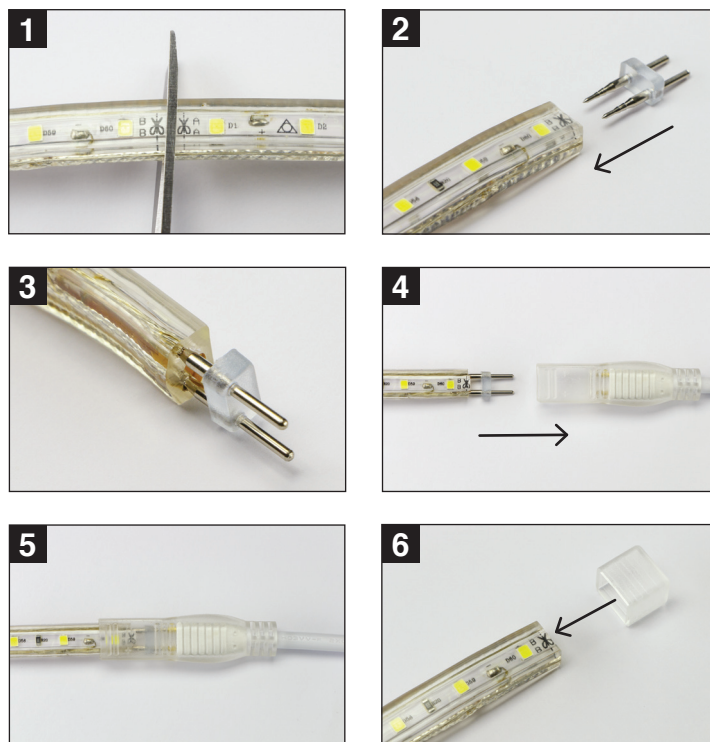

BIZLINE SAS PARIS - FRANCE