# CC COMPACT SIMPLE FIX DIMMABLE







### EasyLine SIMPLE FIX C-PC

186415, 186416, 186447, 186448, 186449, 186450, 186451, 186505, 186710, 186711

### **Typical Applications**

Built-in in compact luminaires for

- Retail lighting
- Downlights
- Residential lighting



### **EasyLine Simple Fix C-PC**

- DIMMABLE: PHASE-CUT TRAILING-EDGE
- DIMMING METHOD: ANALOGUE
- WITH INTEGRATED CORD GRIP FOR INDEPENDENT OPERATION
- SELV
- SUITABLE FOR BUILT-IN INTO FURNITURE
- LONG SERVICE LIFE: UP TO 50,000 HRS.
- PRODUCT GUARANTEE: 5 YEARS



## **EasyLine Simple Fix C-PC**

### **Product features**

Compact casing shape

### **Electrical features**

- Mains voltage: 220-240 V ±10%
- Mains frequency: 50-60 Hz
- Push-in terminals primary: 0.75-1.5 mm<sup>2</sup>, secondary: 0.5-1.5 mm<sup>2</sup> or 0.25-1.5 mm<sup>2</sup> (186505) or 1.5-2.5 mm<sup>2</sup> (186710, 186711)
- Power factor at full load: 0.95 (186415, 186416, 186450, 186451) or 0.9 (186447, 186448, 186449, 186505) or 0.98 (186710, 186711)
- Open circuit voltage (U<sub>max.</sub>): 60 V or 30 V (186448) or 35 V (186450)
- Secondary side switching of LED modules is not allowed.

### **Dimming**

- Dimmable with phase-cutting trailing-edge dimmer
- The compatibility of the driver and the dimmer has to be confirmed prior to installation to avoide flickering and/or noises.
- Dimming range: 5 to 100% or 10-100% (186447, 186448, 186449, 186710, 186711)
- If no dimming interface is connected, brightness will stay at 100%.

### Safety features

- Protection against transient main peaks up to 1 kV (between L and N) or 0.5 kV (186447, 186448, 186449)
- Electronic short-circuit protection
- Overload protection
- Protection against "no load" operation
- Degree of protection: IP20
- Protection class II
- SELV

### **Packaging units**

Ref. No.	Packaging unit						
	Pieces	Boxes	Weight				
	per box	per pallet	g				
186415, 186416	20	112	140				
186447, 186448,	20	192	70				
186449							
186450	20	112	140				
186451	20	112	170				
186505	20	112	100				
186710, 186711	20	165	82				





30 000

😰 hours
















### **Dimensions**


Ref. No.	Casing	Length	Width	Height
		mm	mm	mm
186710, 186711	K51.1	115	45	25
186447, 186448,	K52	122.8	45	19
186449				
186415, 186416,	K53	153	41.4	32
186450, 186451,				
186505				

Ref. No.	Casing	Length	Width	Height
		mm	mm	mm
186710, 186711	K51.1	115	45	25
186447, 186448,	K52	122.8	45	19
186449				
186415, 186416,	K53	153	41.4	32
186450, 186451,				
186505				
		•		


### K51.1



### **K52**



### K53



### **Applied standards**

- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2
- EN 62384
- EN 55015





except 186448





### **Dimming**

Analogue



### Product guarantee

- 5 years for operation at recommended operation temperature (see table for expected service life time on the next page)
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com). We will be happy to send you these conditions upon request.



### LED Drivers – EasyLine Simple Fix C-PC

### **Electrical characteristics**

Max.	Туре	Ref. No.	Voltage	Mains	Inrush	Current	Voltage	THD	Efficiency	Ripple
output			50-60 Hz	current	current	output DC	output	at full load	at full load	100 Hz
W			V	mA	A / µs	mA (± 8%)	DC (V)	% (230 V)	% (230 V)	%
6	ECXd 150.151	186447	220-240	40-35	3 / 238	150	27-41	21.16	> 78	< 20
10	ECXd 250.270	186710	220-240	55-45	1.9 / 40	250	20-40	10	> 85	< 33
	ECXd 500.152	186448	220-240	60-50	5.5 / 120	500	13-20	27.8	> 80	< 20
12	ECXd 250.153	186449	220-240	70-60	6/113	250	27-48	26	> 80	< 20
	ECXd 300.271	186711	220-240	66-54	2.2 / 47	300	20–40	9	> 85	< 36
18	ECXd 350.130	186415	220-240	100-90	13.2 / 257	350	32-52	8.6	> 85	< 5
18	ECXd 700.154	186450	220-240	95-85	13.3 / 249	700	16-26	8.2	> 85	< 5
21	ECXd 500.186	186505	220-240	110-100	1.2 / 50	500	28-42	17.1	> 85	< 5
25	ECXd 700.131	186416	220-240	140-120	13.7 / 257	700	22-36	9.2	> 85	< 5
36	ECXd 700.155	186451	220-240	190-170	15.7 / 242	700	32-52	9.2	> 83	< 5

### **Maximum ratings**

Exceeding the maximum ratings can lead to reduction of service life or destruction of the drivers.

Ref. No.	Ambient ten	Ambient temperature Operation humidity		Storage		Storage humidity		Max. operation	Degree of	
	range		range		ange temperature range		range		temperature at t <sub>c</sub> point	protection
	°C min.	°C max.	% min.	% max.	°C min.	°C max.	% min.	% max.	°C	
186447, 186448, 186449, 186450	-15	+45	20	60	-40	+85	5	95	+70	IP20
186505									+75	
186415, 186416, 186451									+80	
186710, 186711	-20	+50					10	90	+70	

### **Expected service life time**

at operation temperatures at  $t_{\text{C}}$  point

Operation	Ref. No.										
current	186415, 1	86416, 186451	186505		186447, 186448, 186449, 186450, 186710, 186711						
All	70 °C*	80 °C	65 °C*	75 °C	60 °C*	70 °C					
hrs.	50,000	30,000	50,000	30,000	50,000	30,000					

<sup>\*</sup> recommended operation temperature



#### **Product labels**


























### Typ. performance graphs for 186710 / Type ECXd 250.270

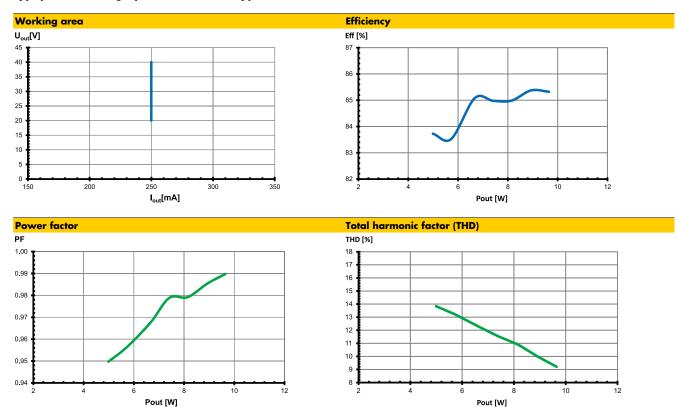



### Typ. performance graphs for 186711 / Type ECXd 300.271

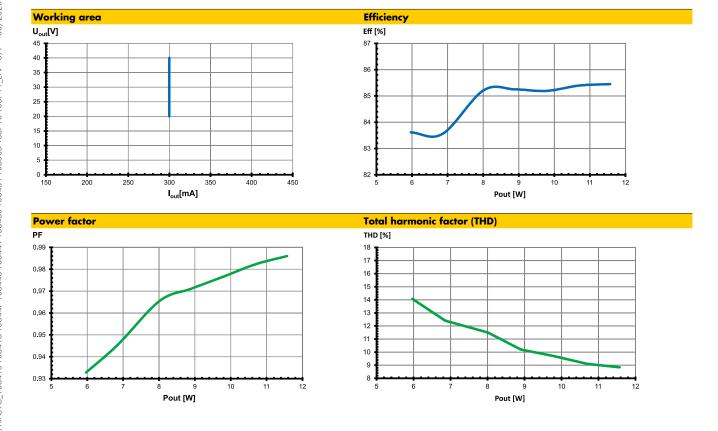





### Typ. performance graphs for 186505 / Type ECXd 500.186

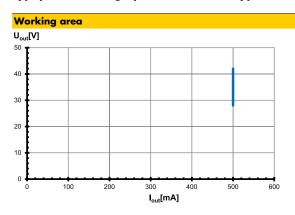

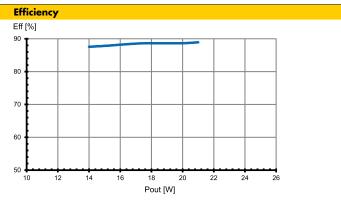

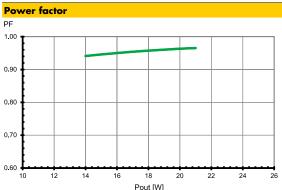

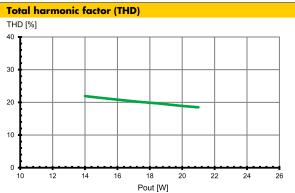

### Safety functions

Transient mains peaks protection:

Values are in compliance with EN 61547 (interference immunity).

Surges between L-N: up to 1 kV

- Short-circuit protection: Control gears are protected against short-term short-circuit
- Overload protection: Control gears only work in range of rated output power and voltage problemfree (< 60 V DC).</li>

Please check before switch-on mains power supply that the selected LED load is suitable (see Electrical Characteristics on data sheet).

- No load operation: Control gears are protected against no load operation (open load).
- If any of the above mentioned safety functions will be triggered, disconnect the control gear from the power supply then find and eliminate the cause of the problem.

### List of compatible dimmers

Manufacturer	Dimmer type
Elko	316 GLED
Elko	315 GLE
Elko	315 GLE 2-pol
Elko	630 GLE
Legrand	ASW3000H
Micromatic	UNILED+325
Moeller Eaton	x-comfort, type CDAE-01/02
SG	LEDDIM 400

Minimum dimmer load has to be observed.

Minimum dimming load incl. tolerances for LED drivers

- 186415: min. 12 W
- 186416: min. 16 W
- 186447: min. 4 W
- 186448: min. 7 W
- 186449: min. 7 W
- 186450: min. 12 W
- 186451: min. 23 W
- 186505: min. 14 W
- 100303.11111.14 //
- 186710: min. 5 W
- 186711: min. 6 W

The compatibility of the dimmers of other manufacturers has to be tested prior to installation.



### **Assembly and Safety Information**

Installation must be carried out under observation of the relevant regulations and standards. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advices must be observed; non-observance can result in the destruction of the LED drivers, fire and/or other hazards.

### **Mandatory regulations**

- DIN VDE 0100
- EN 60598-1

### Mechanical mounting

• Mounting position: Independent application: Drivers are

allowed to use for independent applications

Mounting location: Independent LED drivers do not need to be

integrated into a casing.

Installation in outdoor luminaires: degree of protection for luminaire with water protection

rate ≥ 4 (e.g. IP54 required).

• Degree of protection: IP20

• Clearance: Min. 0.10 m from walls. ceilings and

insulation

Surface: Solid and plane surface for optimum

heat dissipation required.

• Heat transfer: If the driver is destined for installation in a

luminaire. sufficient heat transfer must be ensured between the driver and the luminaire

casing.

LED drivers should be mounted with the greatest possible clearance to heat sources. During operation, the temperature measure at the driver's t<sub>c</sub> point must not exceed the

specified maximum value.

• Fastening: Using M4 screws in the designated holes

• Tightening torque: 0.2 Nm

### **Electrical installation**

Connection

terminals: Push-in terminals for rigid or flexible conductors

with a section of primary: 0.75–1.5 mm<sup>2</sup>, secondary: 0.5–1.5 mm<sup>2</sup> or 0.25–1.5 mm<sup>2</sup> 186505) or 1.5–2.5 mm<sup>2</sup> (186710, 186711)

• Stripped length: 8.5–10 mm

• Wiring: The mains conductor within the luminaire must

be kept short (to reduce the induction of

interference).

Mains and lamp conductors must be kept separate and if possible should not be laid

in parallel to one another.

Max. secondary side lead length: 3 m Please ensure the correct polarity of the leads

prior to commissioning. Reversed polarity can

destroy the modules.

• Through-wiring: Is not allowed.

• Secondary load: The sum of forward voltages of LED loads is


within the tolerances which are mentioned in the Electrical Characteristics on the data


Parallel wiring: Para

Parallel connection of LED loads is not

allowed.

• Wiring diagram:





### Selection of automatic cut-outs for VS LED drivers

• Dimensioning automatic cut-outs

High transient currents occur when an LED driver is switched on because the capacitors have to load. Ignition of LED modules occurs almost simultaneously. This also causes a simultaneous high demand for power. These high currents when the system is switched on put a strain on the automatic conductor cut-outs. which must be selected and dimensioned to suit.

• Release reaction

The release reaction of the automatic conductor cut-outs comply with VDE 0641. part 11. for B. C characteristics. The values shown in the following tables are for guidance purposes only and are subject to system-dependent change.

• No. of LED drivers

The maximum number of VS LED drivers applies to cases where the devices are switched on simultaneously. Specifications apply to single-pole fuses. The number of permissible drivers must be reduced by 20% for multi-pole fuses. The considered circuit impedance equals 400 m $\Omega$  (approx. 20 m [2.5 mm²] of conductor from the power supply to the distributor and a further 15 m to the luminaire).

Туре	Ref. No.	Automatic cut-out type and possible no. of VS drivers pcs.									
Automatic cut-	out type	B 10 A	B 13 A	B 16 A	C 10 A	C 13 A	C 16 A				
ECXd 350.130	186415	23	30	37	39	50	62				
ECXd 700.131	186416	22	29	36	37	49	60				
ECXd 150.151	186447	113	147	181	189	245	302				
ECXd 500.152	186448	127	166	204	166	216	266				
ECXd 250.153	186449	124	162	199	142	185	228				
ECXd 700.154	186450	24	31	39	40	52	65				
ECXd 700.155	186451	21	27	34	35	46	56				
ECXd 500.186	186505	<i>7</i> 9	103	126	<i>7</i> 9	103	126				
ECXd 250.270	186710	169	220	271	169	220	271				
ECXd 300.271	186711	144	188	231	144	188	231				

 To limit capacitive inrush currents the current carrying capacity of each circuit breaker (fuse) can be increased by a factor of 2.5 with the help of our ESB (Ref. No.: 149820, 149821, 149822) inrush current limiters.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.



• Polarity: