


TE Internal #: 1SNA400156R0200 Feed-Through, Pluggable Terminal Block, Beige, Product Spacing 7.62 mm [.3 in], 1 Position, Insulation Displacement (IDC), Modular Terminal Blocks

View on TE.com >



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: Feed-Through

Modular Terminal Block Product Type: Pluggable Terminal Block

Primary Product Color: Beige

Product Spacing: 7.62 mm [.3 in]

Number of Positions: 1

Features

Product Type Features

Modular Terminal Block Product Type

Configuration Features

Number of Levels

Pluggable Terminal Block

1

Number of Circuits	1
Block Function	Feed-Through
Number of Positions	1
Electrical Characteristics	
Short-Time Withstanding Current Rating @ 1s	180 A
Voltage Rating (NF F 61-017)	500 V
Current Rating (NF F 61-017)	16 A
Voltage Rating (IEC)	500 V
Current Rating (IEC)	24 A
Operating Voltage	500 VAC
Body Features	
Product Weight	8.4 g[.296 oz]
Primary Product Color	Beige
Contact Features	
Contact Current Rating (Max)	24 A

C For support call+1 800 522 6752

Feed-Through, Pluggable Terminal Block, Beige, Product Spacing 7.62 mm [.3 in], 1 Position, Insulation Displacement (IDC), Modular Terminal Blocks



Termination Features

Termination Method to Wire & Cable	Insulation Displacement (IDC)
Mechanical Attachment	
DIN Rail Mounting Type	TH35-15, TH35-7.5
Terminal Block Disconnect Type	Plug
Connector Mounting Type	DIN Rail
Housing Features	
Housing Material	Polyamide
Dimensions	
Product Depth	29 mm[1.141 in]
Product Width	7.6 mm[.299 in]
Product Length	29 mm[1.141 in]
Product Height	48.5 mm[1.909 in]
Product Spacing	7.62 mm[.3 in]
Wire Size	2.5 mm ²
Usage Conditions	

Operating Temperature Range

-55 – 110 °C[-67 – 230 °F]

Industry Standards

IP Rating

IP20

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability


Feed-Through, Pluggable Terminal Block, Beige, Product Spacing 7.62 mm [.3 in], 1 Position, Insulation Displacement (IDC), Modular Terminal Blocks




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

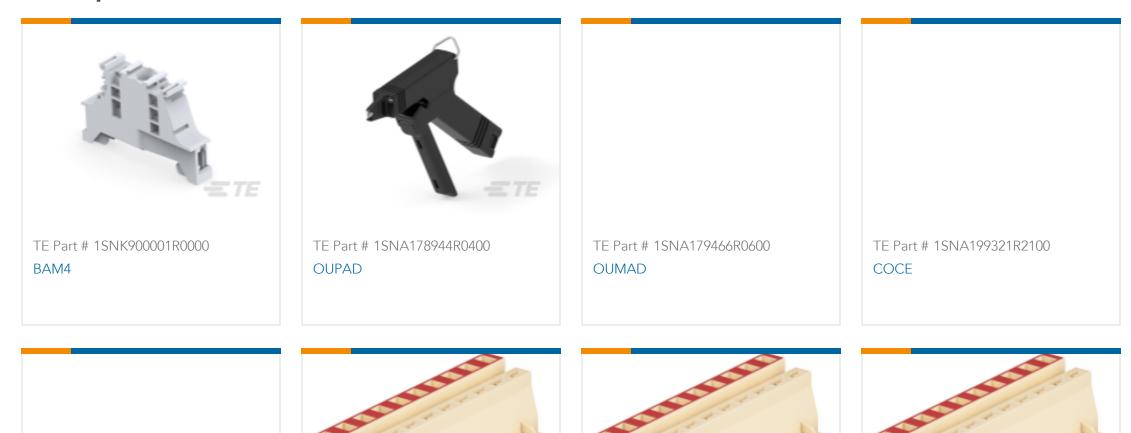

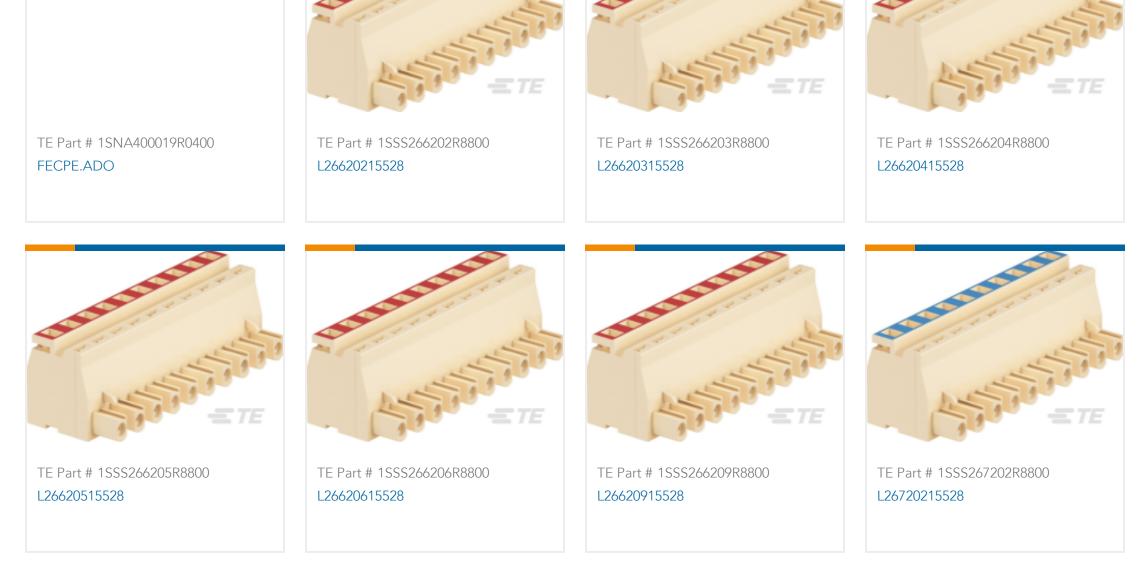

Feed-Through, Pluggable Terminal Block, Beige, Product Spacing 7.62 mm [.3 in], 1 Position, Insulation Displacement (IDC), Modular Terminal Blocks




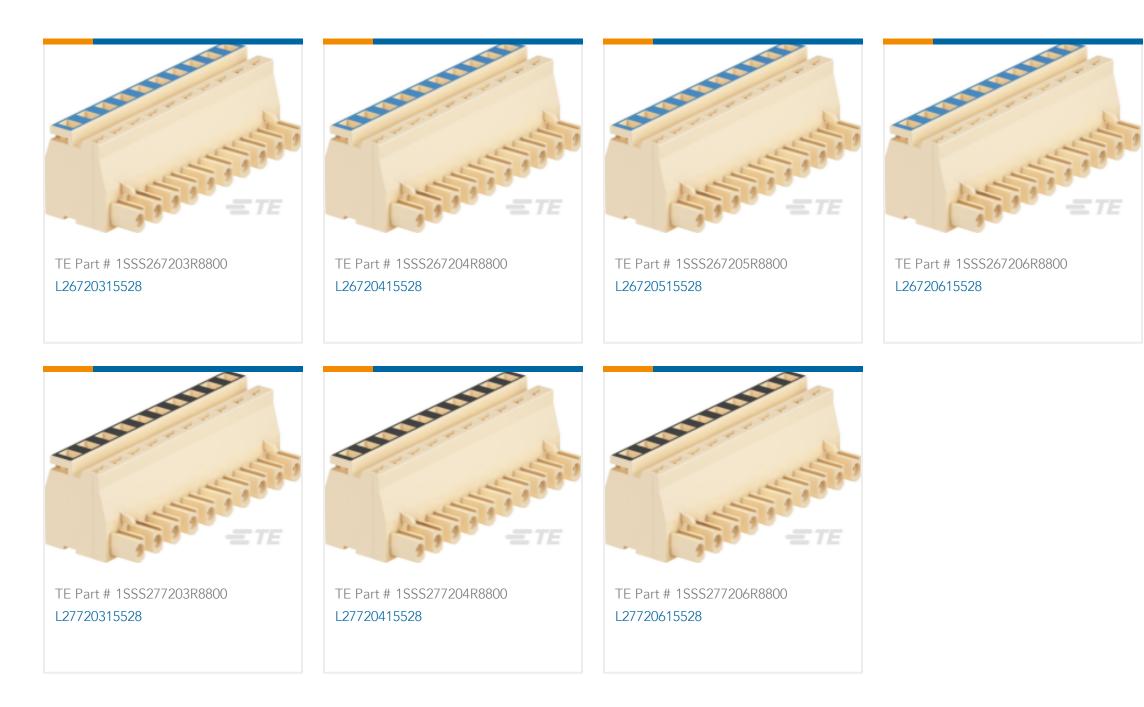


Customers Also Bought



TE Part #165085



TE Part #726386-2



TE Part #1SNA400153R0700



TE Part #1SNK900001R0000

PG WIRE PIN 12-10	250 FASTON TAB TPBR	D1.5/7.ADO-CPE.NF	BAM4	
TE Part #1SNA400019R0400				
FECPE.ADO				
Documents				
Product Drawings				
D2.5/7.ADO-CPE.NF1				

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNA400156R0200_A.2d_dxf.zip

Feed-Through, Pluggable Terminal Block, Beige, Product Spacing 7.62 mm [.3 in], 1 Position, Insulation Displacement (IDC), Modular Terminal Blocks



English

Customer View Model ENG_CVM_CVM_1SNA400156R0200_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNA400156R0200_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages D2.5/7.ADO-CPE.NF1

English