




FICHE TECHNIQUE - TECHNICAL SPECIFICATIONS

4LR44

PCA9030

CARACTERISTIQUES ELECTRIQUES ELECTRICAL CHARACTERISTICS


IEC - JIS - ANSI	4LR44
Others	PX28A - A544 - K28A - V34PX
Couple chimique/Chemical system	Zn/KOH-H ² O/MnO ²
Tension nominale/Nominal Voltage	6V
Teneur en métaux lourds/Heavy metal contents	Hg < 2% - Cd < 0.002%

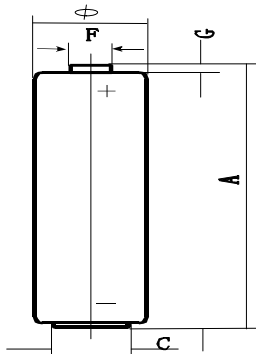

DIMENSIONS

A	23.9 à/to 25.2mm
Φ	12 à/to 13mm
C	5mm
F	5 à/to 6.5mm
G	0.7mm
Poids/Weight	10.2gr

Décharge à 5mA / Discharge at 5mA

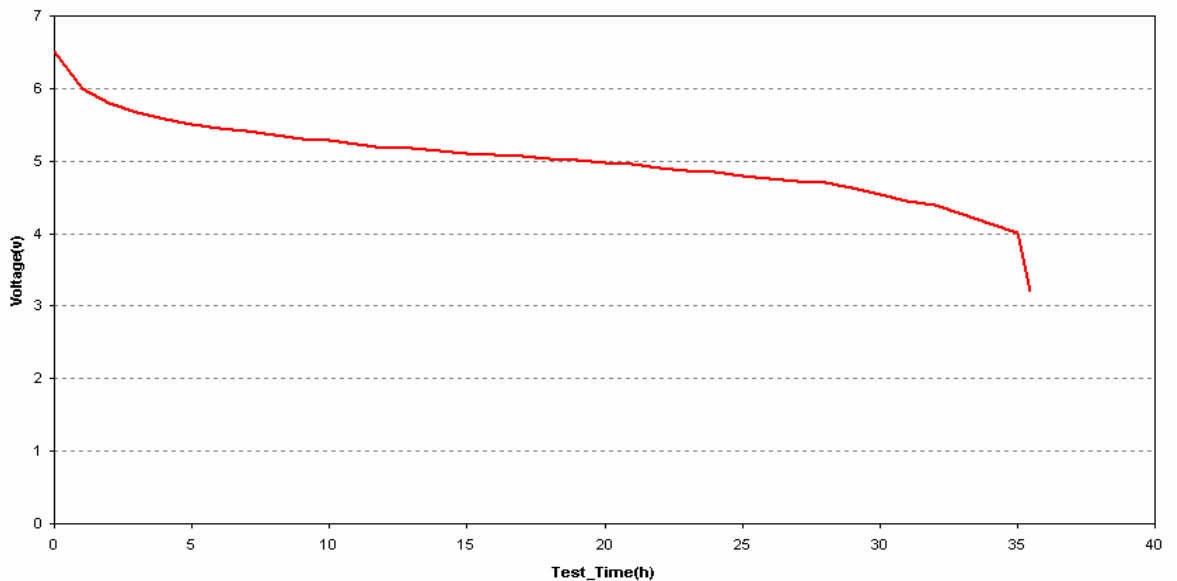

TESTS DE RESISTANCE AUX FUITES / LEAKAGE RESISTANCE TESTS

Tests de fuite à la décharge / Over discharge leakage tests :

Echantillons / samples : 60 pieces

Conditions de tests / Tests conditions : stockage pendant 20 jours / store 20 days under T = 60+/-2°C RH = 90+/-5%

Résultats/Results : pas de fuite visible / no visible leakage

DATE LIMITE D'UTILISATION / EXPIRY PERIOD

Indiqué sur la pile/noted on the battery : 5 ans/years

à une température de stockage de/within a storage temperature of : 10 à/to 25°C