


EVEREADY PP9



Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)
Designation: ANSI / NEDA-1603, IEC-6F100
Battery Voltage: 9.0 Volts
Volume: 261 cubic centimeters (15.9 cubic inch)
Average Capacity: 5000 mAh to 0.8 volts/cell
 (Rated at 25 mA continuous drain at 21°C)
Cells: Thirty six No. 117 - Six parallel strings of six in series.
Jacket: Metal

TYPICAL DISCHARGE CURVE

Simulated Test @ 21°C (70°F)

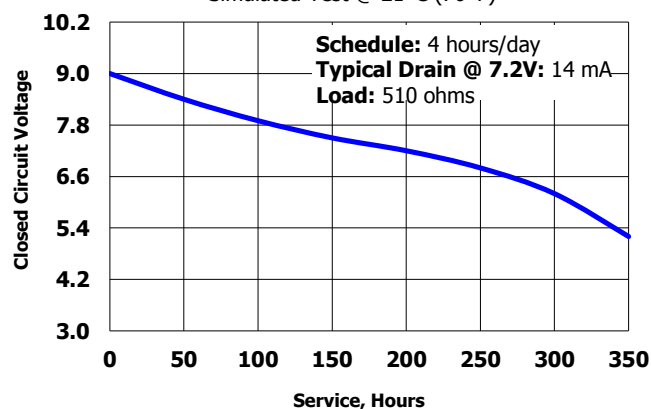

Simulated Application Test Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 7.2V (milliamperes)	Load (ohms)	Cutoff Voltage		
			5.2V	6.2V	7.5V
4 hours/day	14	510	330	300	150

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. Inc. - All Rights Reserved