

PRODUCT-DETAILS

B23 112-100

B23 112-100, Energy meter'Steel', Modbus RS485, Three-phase, 5 A



Informations générales	
Extension du type de produit	B23 112-100
Code de produit	2CMA100164R1000
ABB désignation de type	B23 112-100
EAN	7392696001649
Description courte	B23 112-100, Energy meter'Steel', Modbus RS485, Three-phase, 5 A
Description longue	Advanced compact DIN-rail meter with an easy to read back lighted display. The meter is intended for use in the commercial or residential buildings etc. The meter can be used in 3 or 4 wire systems. The meter has several instrumentation values, 25 possible alarms and event logs. Three phase direct connected for active energy. One output for pulses or alarm etc. RS-485 communication over Modbus RTU or EQ Bus. Accuracy class 1.0 (or B for MID meters). The meters is IEC approved + MID approved and verified.

Eco Transparence	
Environmental Product Declaration - EPD	9AKK108467A4138

Technique	
Normes et standards	EN 50470-1
Fonction	Electricity meter

Sub-Function	Steel
Tension nominale (U _r)	3x220-240 V
Voltage Range	3x176...276 V
Courant nominal (I _n)	5 A Maximum 65 A
Intensité de courant	5 A
Fréquence assignée (f)	50 / 60 Hz 0.721 W
Interface de communication	Modbus RS485
Précision	Active Energy Class B MID (±1%)
Measuring Instrument Conformity	Measurement Instrument Directive (MID)
Meter Tariff Rating	One-Tariff
Pulse Output Rate	1-999999
Nombre de pôles	4
Nombre de phases	Three-phase
Number of Counter Positions	7
Nombre d'entrées/sorties numériques	1 DO
Meter Type	Direct connected
Type de montage	DIN-Rail
Pulse Output Type	Electrical
Type d'affichage	Digital
Matériau du boîtier	Polycarbonate in transparent front glass. Glass reinforced polycarbonate in bottom case and upper case. Polycarbonate in terminal cover.
Option E/S	1 digital output
Communication	Modbus RTU
Connecting Capacity Main Circuit	1 ... 25 mm²

Material Compliance

Informations RoHS	2CMC485006
Statut RoHS	Following EU Directive 2002/95/EC August 18, 2005 and amendment
Date RoHS	2012-36
Conflict Minerals Reporting Template (CMRT)	9AKK108468A3363

Environnement

Température de l'air ambiant	Operation -40 ... 70 °C
Indice de protection	IP20
Informations environnementales	2CMC485003D0001

Dimensions

Width in Number of Modular Spacings	4
-------------------------------------	---

Produit Largeur Net	70 mm
Produit Hauteur Net	26.5 mm
Produit Longueur Net	65 mm
Poids net	0.32 kg
Taille	97X70X65

Commande

Emballage Niveau 1 Unités	box 1 pièce
Emballage Niveau 1 Poids	0.39 kg
E-Number (Finland)	6625034
E-Number (Sweden)	0900037

Certificats et Déclarations (Numéro de document)

Déclaration de Conformité - CE	2CMC485001D0001
--------------------------------	-----------------

Installation

Instructions et manuels	2CMC485019M0201
-------------------------	-----------------

Downloads Préférés

Fiche produit, informations techniques	2CMC485003M0201
--	-----------------

Classifications


ETIM 8	EC001506 - Kilowatt-hour meter
ETIM 9	EC001506 - Kilowatt-hour meter
Catégorie DEEE	5. Small Equipment (No External Dimension More Than 50 cm)
WEEE B2C / B2B	Business To Consumer
CN8	90283019
eClass	V11.0 : 27142316
Code de classification d'objet	P

Accessories

Identifier	Description	Type	Quantity	Unit Of Measure
2CCG000242R0001	SCU100 Control unit	SCU100	1	piece
2CDG110226R0011	QA/S3.16.1 Energy Analyzer, M-Bus, 16 Devices, MDRC	QA/S3.16.1	1	piece
2CDG110227R0011	QA/S3.64.1 Energy Analyzer, M-Bus, 64 Devices, MDRC	QA/S3.64.1	1	piece
2CDG110228R0011	QA/S4.16.1 Energy Analyzer, Modbus RTU, 16 Devices, MDRC	QA/S4.16.1	1	piece
2CDG110229R0011	QA/S4.64.1 Energy Analyzer, Modbus RTU, 64 Devices, MDRC	QA/S4.64.1	1	piece
2CDG110224R0011	QA/S1.16.1 Energy Analyzer, KNX, 16 Devices, MDRC	QA/S1.16.1	1	piece

Catégories

Produits basse tension → Appareillage modulaire et parafoudres → Compteurs d'énergie → Compteurs d'énergie

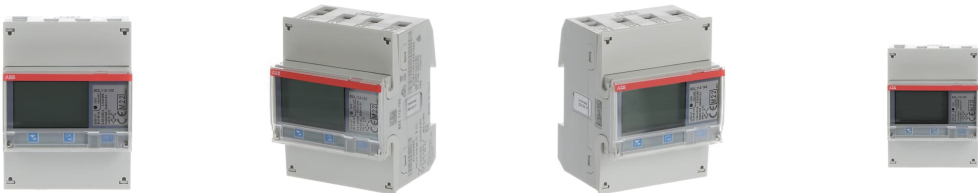

360°