

## **Operating Guide**

# ABNM A5 LOG/LIN for AB-QM, 0-10 V Proportional

Fits to AB-QM DN 10-32 (1/2-11/4 inch)










## 1. Mounting / demounting



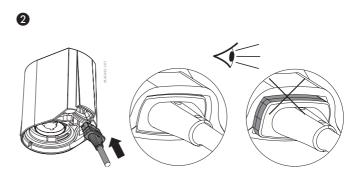











## **ABNM A5**

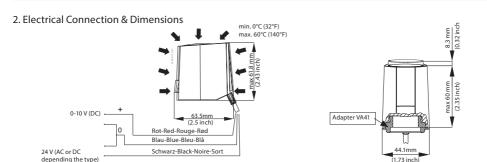

### 3. Unlock NC version (First Open Function)



#### 4. NO/NC version 5. Auto Calibration 6 min Stores calibration values after 8 hours. 30 min Q [l/h] NO versions NC versions ≈6 min ≈30 min t [min] ABNM A5 NO & AB-QM ABNM A5 NC & AB-QM Unlock (NC) Auto calibration Regular operation Detection of open/close point

### ІМПОРТЕР:

UA: ТОВ з II «Данфосс ТОВ», вул. Вікентія Хвойки, 15/15/6, м. Київ, 04080, Україна

### Danfoss A/S

Climate Solutions • danfoss.com • +45 7488 2222

Any information, including, but not limited to information on selection of product, its application or use, product design, weight, dimensions, capacity or any other technical data in product namuals, catalogues descriptions, advertisements, etc. and whether made available in writing, and aliky electronically, online ovi as done, dish allo exonitive end is only binding if and to the extent, explicit reference is made in a quotation or order confirmation. Danfoss cannot accept any responsibility for possible errors in catalogues, brochures, videos and other material. Danfoss reserves the right to alter its products without notice. This also applies to products ordered but not delivered provints can be made without changes to form, fit or function of the product.

All trademarks in this material are property of Danfoss A/S or Danfoss group companies. Danfoss some that Danfoss logo are trademarks of Danfoss A/S. All rights reserved.