



bar

0,5



max.
10



5
1




°C



max.
70°









60°



DIN
1988

DIN
EN
806



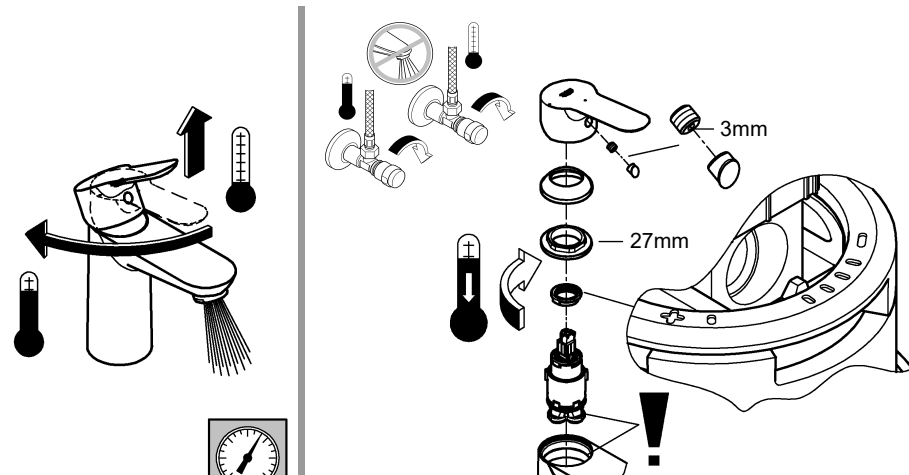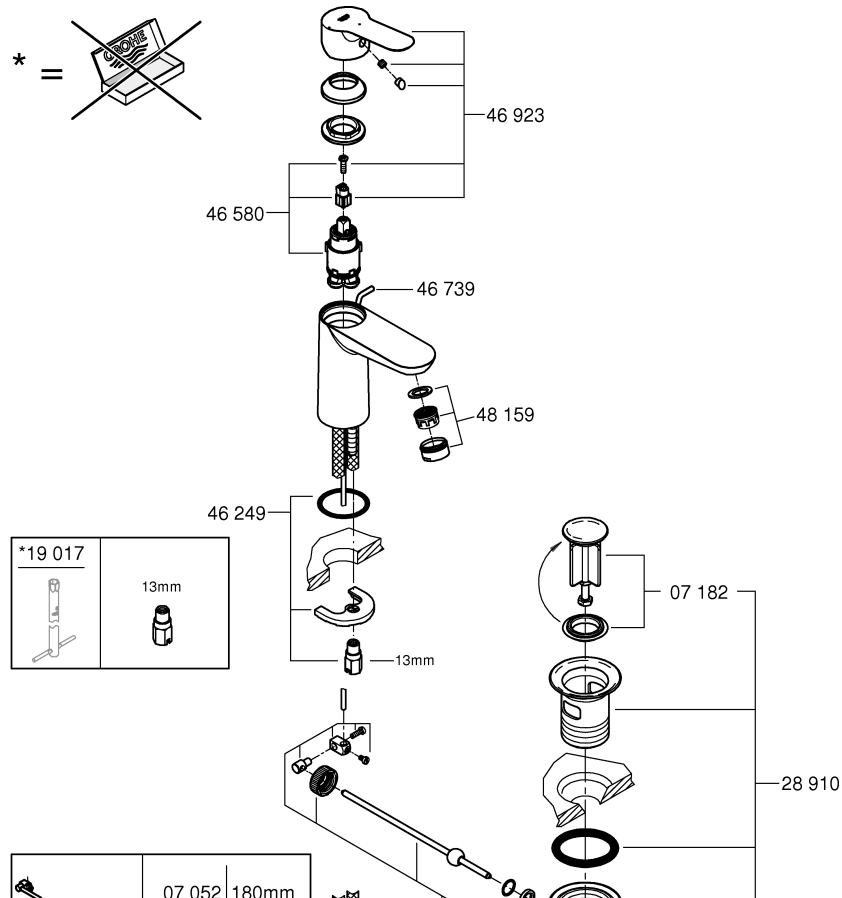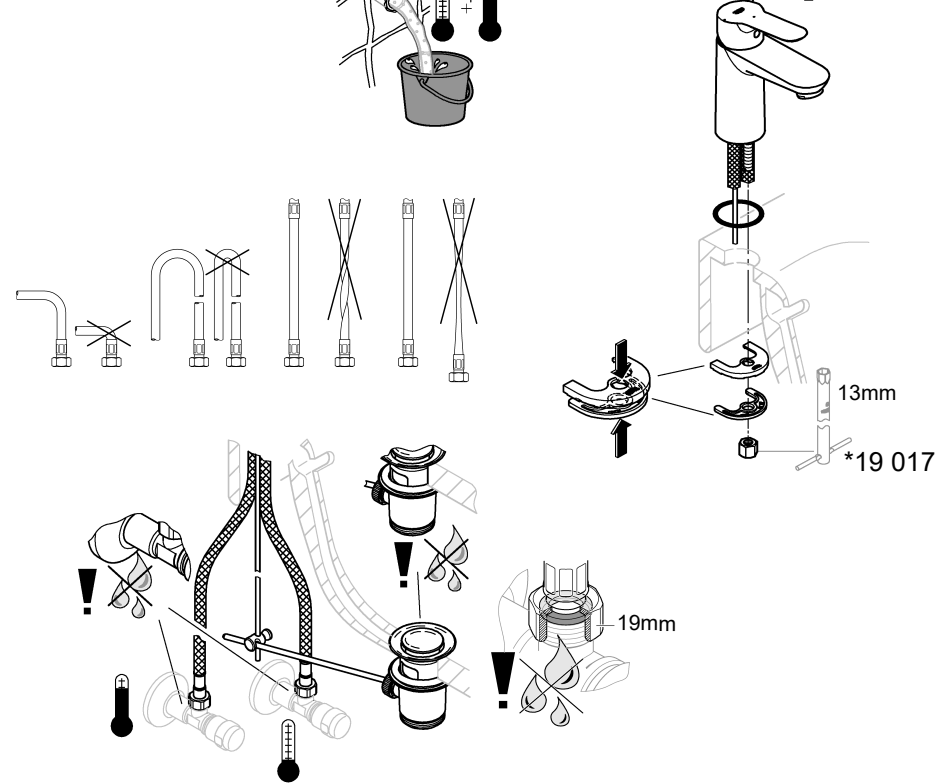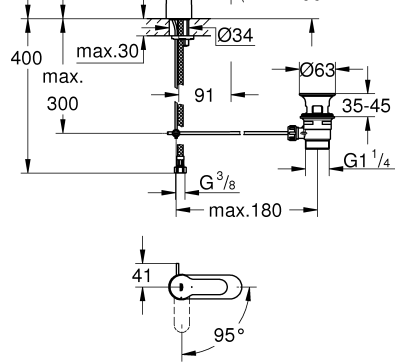

23 561

