

GGM POEINJREP



Feature:

1. Provide 3x 10/100Mbps Ethernet ports, one PoE input port, two PoE output ports;
2. Use advanced network cable driving technology, the longest distance up to 300m;
3. PoE power supply is compatible with End-span and Mid-span;
4. Meet standards of IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX, IEEE802.3af/at;
5. Excellent circuit isolation protection, effectively improve product's lightning protection, ESD and anti-interference;

Specification

Item	Description	
Power	Power Supply	PoE Power Supply
	Consumption	<3 W
Ethernet Port	Ethernet Port	PoE IN Port:10/100Mbps, PoE Input Port PoE OUT Port:10/100Mbps, PoE Output Port
	Transmission Distance	150 m About the relationship between distance and power, Please refer to table 1
	Trnsmission Medium	Cat5e/6
	PoE Protocol	Support IEEE802.3af, IEEE802.3at Protocol
	PoE Mode	Compatible with End-Span and Mid-Span
Network Switch	Network Standard	IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX
	Network Delay	<20us
LED Status Indicator	LED	PoE IN Port and PoE OUT Port: RJ45 yellow light indicates PoE status; green light indicates data exchange
Protection	ESD	1a Contact Discharge Leve 3 1b Air Discharge Level 3 Per: IEC61000-4-2
	Communication Lightning Protection	Per: IEC61000-4-5 Level 3
Environmental	Working Temperature	-40 °C ~75 °C
	Storage Temperature	-40 °C~85 °C
	Humidity (Non-Condensing)	0~95%
Mechanical	Size (L×W×H)	103mm×82mm×25mm
	Material	Aluminum
	Color	Black
	Weight	195 g


SCENARIO



[Application 2]

[Application 1]

Cat5e/6

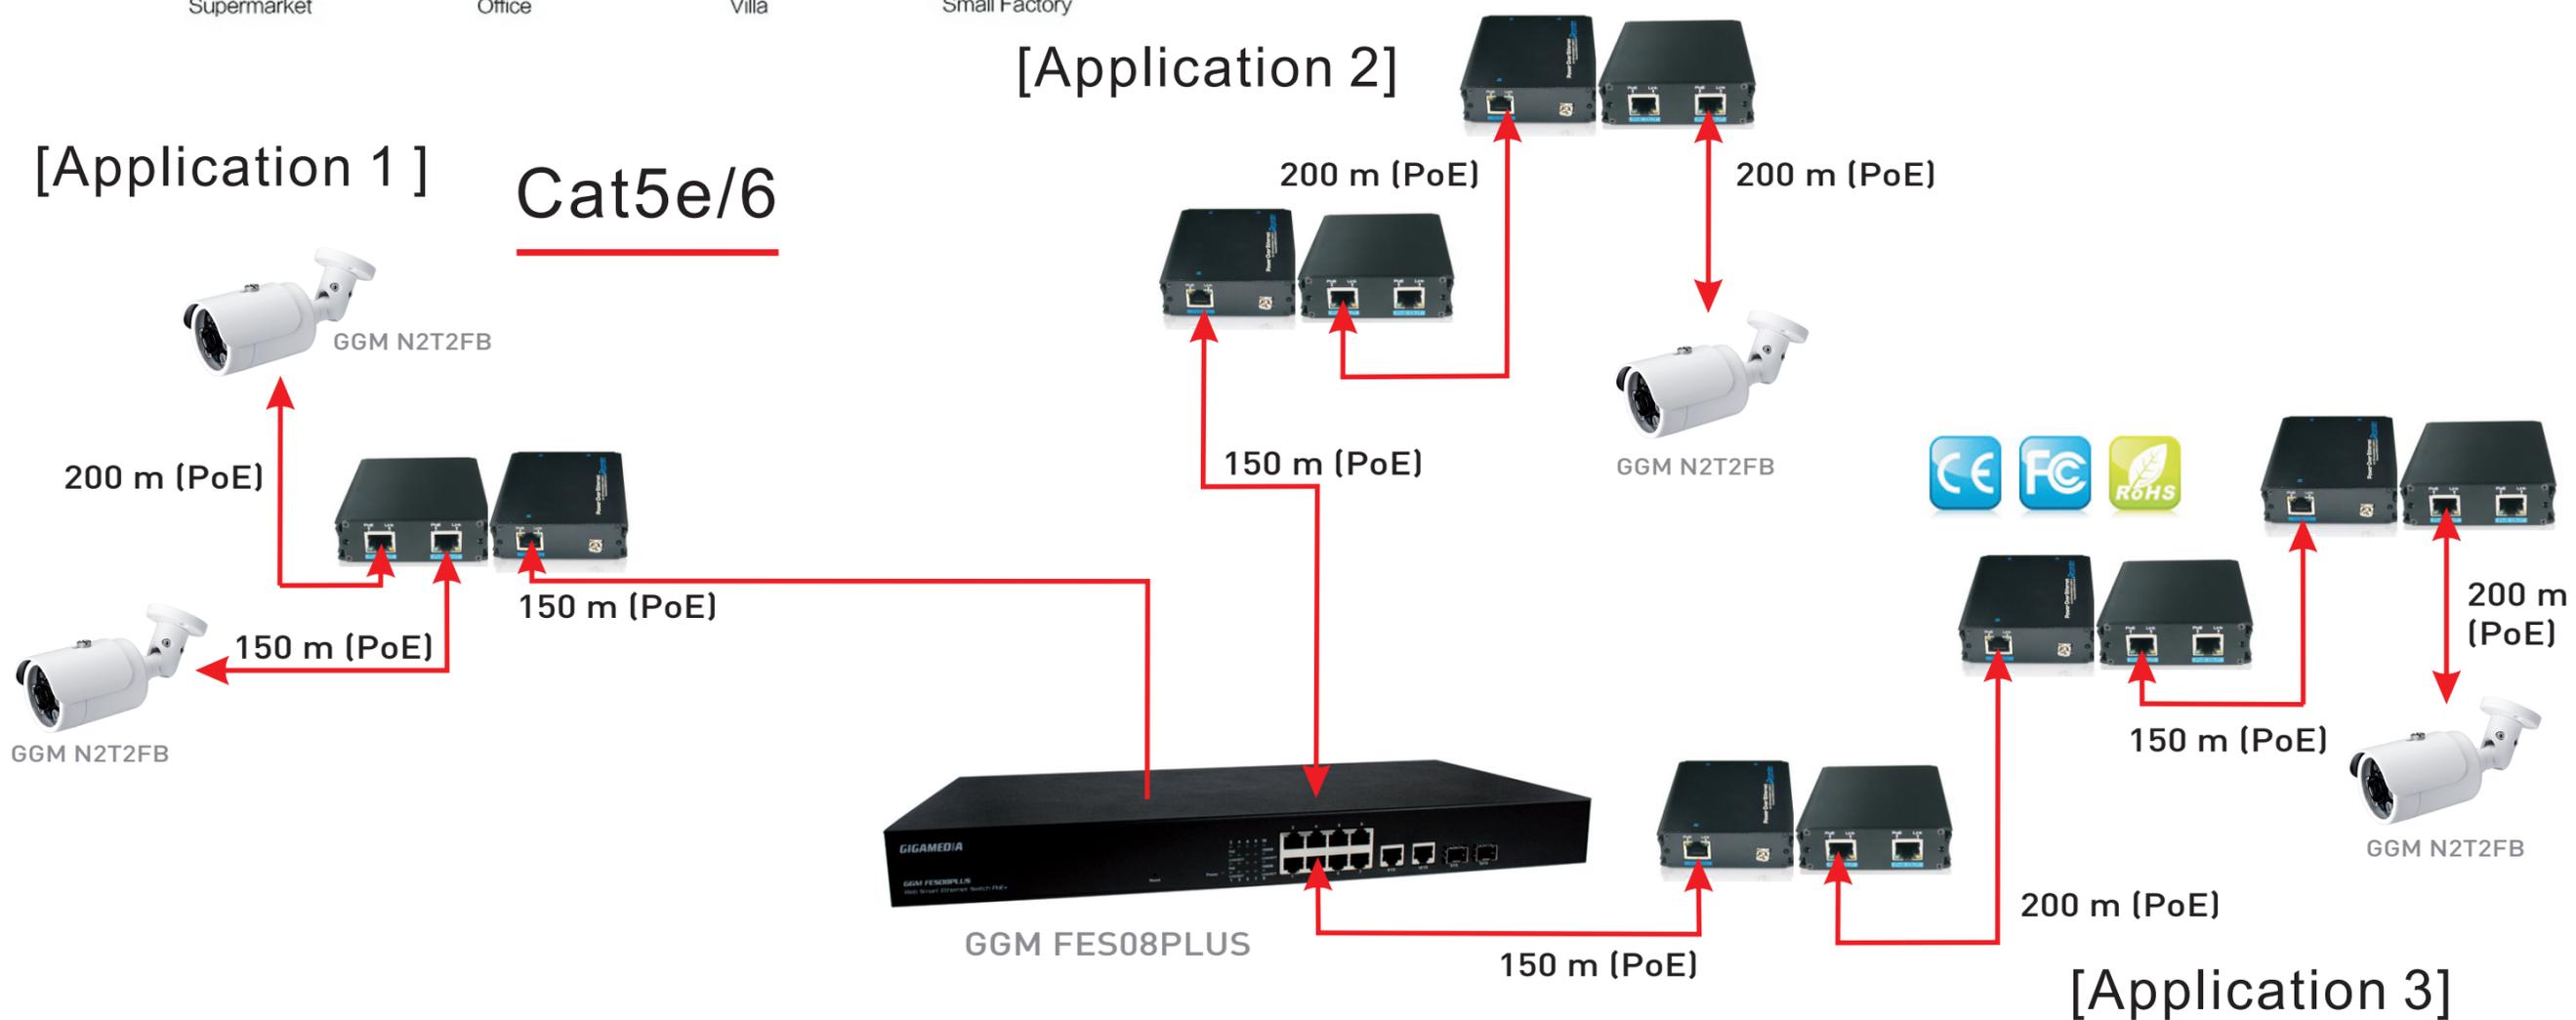

[Application 3]