


HB 101

611980.0031 | Wall luminaires



Wall luminaires
4051859151708
L 110, B 103, H 250

Wall (surface)
anthracite metallic (DB703)

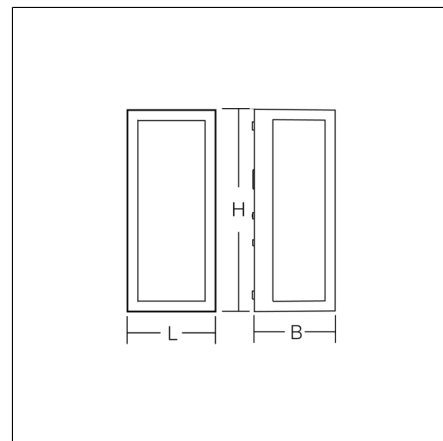

Wall luminaire. Housing: die-cast aluminium, powder-coated. Diffuser: plastic (polycarbonate), opal. Driver integrated.

Product specifications

Length L	110 mm
Width B	103 mm
Height H	250 mm
Weight	0.98 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	810 lm
System power	13 W
System efficiency	62 lm/W
Glare evaluation RUG (4H 8H)	25,1
Beam angle	down 90°/90°/0°/90° up 90°/90°/0°/90°
Rated life	25000 h (L70/B50)
Colour rendering index (CRI)	80
Driver	Converter
Control	on/off
Voltage	200 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	50
Luminaires on B16A fuse	80
Inrush current / Inrush current duration	30 A / 15 µs
CIE Flux Code / CEN Flux Code	12 37 67 50 100
Type of protection	IP 54
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK06
Ambient temperature	-20 °C bis + 25 °C
Conformity mark	CE, EAC