Dome lights
4017506084706
D 185, H 230

portable, pendant
anthracite

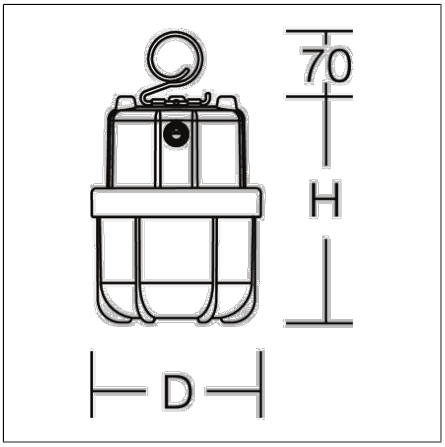

Dome luminaire. Impact-resistant and break-proof 2-component plastic housing. Cover opal, made of impact- and break-resistant plastic (polycarbonate). Uniform, soft and glare-reduced illumination. Folding hook made of stainless steel with drop protection. Can be used as a pendant luminaire or standing on the floor. Heavy rubber power supply cable H07RN-F for high mechanical loads with mains plug. Extensive accessories optionally available (tripods, mounting rails, magnetic holders, etc.).

Product specifications

Diameter D	**185 mm**
Height H	**230 mm**
Weight	**1.53 kg**
Supply cable / plug	**5 m, H07RN-F, 2 x 1,0 mm² / Typ E+F (CEE 7/17)**
Light source	**LED**
Colour temperature	**5000 K**
Rated luminous flux	**4000 lm**
System power	**25 W**
System efficiency	**160 lm/W**
Glare evaluation RUG (4H 8H)	**27,1**
Beam angle	**down 138°** **up 180°**
LED rated life	**25000 h (L70/B10)**
Colour rendering index (CRI)	**80**
Colour tolerance (McAdam)	**5 SDCM**
Photobiological safety according to EN 62471	**Risk group 1**
Driver	**Converter**
Control	**on/off**
Voltage	**220 - 240 V / 50 Hz, 60 Hz**
Luminaires on B10A fuse	**27**
Luminaires on B16A fuse	**43**
Inrush current / Inrush current duration	**30 A / 105 µs**
CIE Flux Code / CEN Flux Code	**37 66 87 86 100**
Type of protection	**IP 65**
Protection class	**II**
Filament test	**650 °C**
Impact resistance	**IK07**
Ambient temperature	**-20 °C bis + 30 °C**
Safety marks	**D-mark**
Conformity mark	**CE**

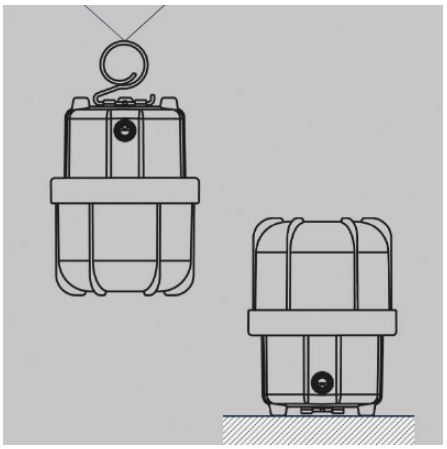

++
optional