


Compact lights
4017506111365
L 352, B 223, H 357

portable
blue

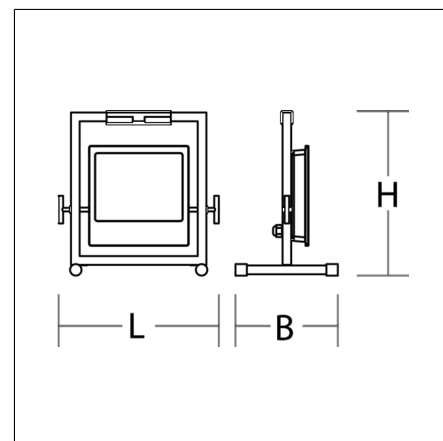

LED spotlight. Robust, powder-coated steel frame. Housing impact-resistant and break-proof (polycarbonate). Cover opal, made of impact- and break-resistant plastic (polycarbonate). Uniform, soft and glare-reduced illumination thanks to multi-LED technology, opal cover and large light emission surface. Light direction 360 degrees rotatable. Bright as a 500 W halogen spotlight, with 90% energy saving! Can be used as a floor light or hanging from a Velcro strap. Heavy rubber power supply cable H07RN-F for high mechanical loads with mains plug. Velcro strap for fixing the supply cable during transport. Luminaire with limited surface temperature in accordance with EN 60598-2-24.

Product specifications

Length L	352 mm
Width B	223 mm
Height H	357 mm
Weight	1.838 kg
Supply cable / plug	3 m, H07RN-F, 2 x 1,0 mm ² /
Light source	LED
Colour temperature	5000 K
Rated luminous flux	4500 lm
System power	47 W
System efficiency	96 lm/W
Glare evaluation RUG (4H 8H)	27,3
Beam angle	101°/103°
LED rated life	30000 h
Colour rendering index (CRI)	80
Colour tolerance (McAdam)	6 SDCM
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	5
Luminaires on B16A fuse	8
Luminaires on C10A fuse	11
Luminaires on C16A fuse	17
Inrush current / Inrush current duration	9 A / 50 µs
CIE Flux Code / CEN Flux Code	56 89 98 100 100
Type of protection	IP 65
Protection class	II
Filament test	850°C - 30 seconds
Impact resistance	IK06 (1 Joule)
Ambient temperature	-30 °C bis + 40 °C
Safety marks	D-mark
Conformity mark	CE

BEAM

70-2000-0006 | Compact lights

