




Compact lights  
4017506086885  
L 320, B 305, H 110

portable  
black

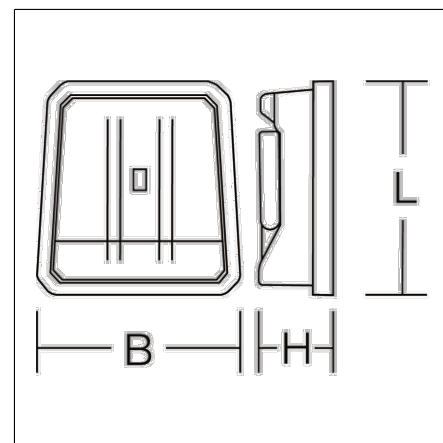

Mobile work light. Impact-resistant and break-proof 2-component plastic housing. Edge protection and handle with soft plastic (thermoplastic elastomer - TPE). Cover opal, made of impact- and break-resistant plastic (polycarbonate). Uniform, soft and glare-reduced illumination thanks to multi-LED technology, opal cover and large light emission surface. Adjustable light direction with plastic bracket (ABS). A socket outlet on the back side allows the connection of additional luminaires or electrical devices. Ergonomically placed switch. Heavy rubber power supply cable H07RN-F for high mechanical loads with mains plug. Extensive accessories optionally available (tripods, mounting rails, magnetic holders, etc.). Luminaire with limited surface temperature in accordance with EN 60598-2-24.

### Product specifications

Length L	320 mm
Width B	305 mm
Height H	110 mm
Weight	2.625 kg
Steckdosen	1 x CEE 24VAC 16A 2p
Supply cable / plug	5 m, H07RN-F, 2 x 1,5 mm <sup>2</sup> / CEE 24VAC 16A 2p
additional functions	with switch
Light source	LED
Colour temperature	5000 K
Rated luminous flux	4700 lm
System power	35 W
System efficiency	134 lm/W
Glare evaluation RUG (4H 8H)	26,2
Beam angle	100°/100°
LED rated life	50000 h (L70/B50)
Colour rendering index (CRI)	80
Colour tolerance (McAdam)	5 SDCM
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter
Control	on/off
Voltage	20 - 35 V / 50 Hz, 60 Hz
Inrush current / Inrush current duration	24.3 A / 439 µs
CIE Flux Code / CEN Flux Code	51 82 97 100 100
Type of protection	IP 44
Protection class	III
Filament test	850°C - 30 seconds
Impact resistance	IK08 (5 Joule)
Ambient temperature	-20 °C bis + 30 °C
Safety marks	D-mark
Conformity mark	CE

## Accessories



95-0008-0001  
Tripod 'Standard', without castors, set with mounting rail for 1 work light



95-0005-0001  
Tripod 'Standard', without castors, set with mounting rail for 2 work lights



95-0003-0001  
Tripod 'Standard', without castors




95-0061-0001  
Tripod 'Profi', 3-part, extendable up to 3.20 m



90-0004-0022  
Mounting rail for 1 or 2 work lights



95-0007-0022  
Magnetic holder, for attachment 1 or 2 work lights



95-0059-0022  
Mounting plate, for 2 mounting rails



95-0290-0006  
Transport bag for work light



95-0009-0001  
Tripod 'Standard', with castors, set with mounting rail for 1 work light



95-0006-0001  
Tripod 'Standard', with castors, set with mounting rail for 2 work lights



95-0004-0001  
Tripod 'Standard', with castors



90-0005-0022.1  
Mounting rail for 1 work light, for tripod and wall mounting



95-0021-0014  
Fixing device for scaffolding, with mounting rail for 1 work light



95-0013-0022.2  
Magnetic holder, for attachment 1 work light



95-0310-0022  
Multi-adaptor for DIN spigot

