




Compact lights
4017506082689
L 320, B 305, H 110

portable
black

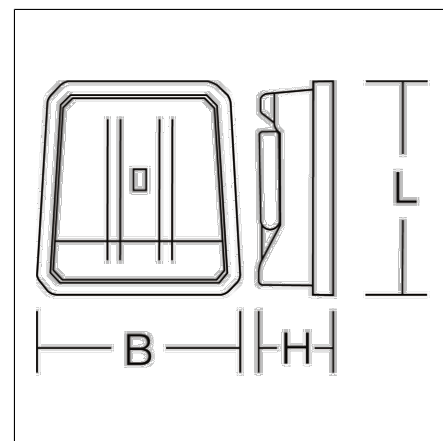

Mobile work light. Impact-resistant and break-proof 2-component plastic housing. Edge protection and handle with soft plastic (thermoplastic elastomer - TPE). Cover opal, made of impact- and break-resistant plastic (polycarbonate). Uniform, soft and glare-reduced illumination thanks to multi-LED technology, opal cover and large light emission surface. Adjustable light direction with plastic bracket (ABS). Three socket outlets on the back side allow the connection of additional luminaires or electrical devices. Ergonomically placed switch. Heavy rubber power supply cable H07RN-F for high mechanical loads with mains plug. Extensive accessories optionally available (tripods, mounting rails, magnetic holders, etc.). Luminaire with limited surface temperature in accordance with EN 60598-2-24.

Product specifications

| | |
|--|---|
| Length L | 320 mm |
| Width B | 305 mm |
| Height H | 110 mm |
| Weight | 2.83 kg |
| Steckdosen | 3 x Typ F (CEE 7/3) |
| Supply cable / plug | 5 m, H07RN-F, 3 x 1,5 mm ² / Typ E+F (CEE 7/7) |
| additional functions | with switch |
| Light source | LED |
| Colour temperature | 5000 K |
| Rated luminous flux | 4700 lm |
| System power | 33 W |
| System efficiency | 142 lm/W |
| Glare evaluation RUG (4H 8H) | 26,2 |
| Beam angle | 100°/100° |
| LED rated life | 50000 h (L70/B50) |
| Colour rendering index (CRI) | 80 |
| Colour tolerance (McAdam) | 5 SDCM |
| Photobiological safety according to EN 62471 | Risk group 0 |
| Driver | Converter |
| Control | on/off |
| Voltage | 220 - 240 V / 50 Hz, 60 Hz |
| Luminaires on B10A fuse | 2 |
| Luminaires on B16A fuse | 3 |
| Luminaires on C10A fuse | 4 |
| Luminaires on C16A fuse | 7 |
| Inrush current / Inrush current duration | 20 A / 200 µs |
| CIE Flux Code / CEN Flux Code | 51 82 97 100 100 |
| Type of protection | IP 54 |
| Protection class | I |
| Filament test | 850°C - 30 seconds |
| Impact resistance | IK08 (5 Joule) |
| Ambient temperature | -20 °C bis + 30 °C |
| Safety marks | D-mark |
| Conformity mark | CE |

Accessories



95-0008-0001
Tripod 'Standard', without castors, set with mounting rail for 1 work light



95-0005-0001
Tripod 'Standard', without castors, set with mounting rail for 2 work lights



95-0003-0001
Tripod 'Standard', without castors




95-0061-0001
Tripod 'Profi', 3-part, extendable up to 3.20 m



90-0004-0022
Mounting rail for 1 or 2 work lights



95-0007-0022
Magnetic holder, for attachment 1 or 2 work lights



95-0059-0022
Mounting plate, for 2 mounting rails



95-0290-0006
Transport bag for work light



95-0009-0001
Tripod 'Standard', with castors, set with mounting rail for 1 work light



95-0006-0001
Tripod 'Standard', with castors, set with mounting rail for 2 work lights



95-0004-0001
Tripod 'Standard', with castors



90-0005-0022.1
Mounting rail for 1 work light, for tripod and wall mounting



95-0021-0014
Fixing device for scaffolding, with mounting rail for 1 work light



95-0013-0022.2
Magnetic holder, for attachment 1 work light



95-0310-0022
Multi-adapter for DIN spigot

