




Compact lights
4017506085567
L 320, B 305, H 110

portable
blue

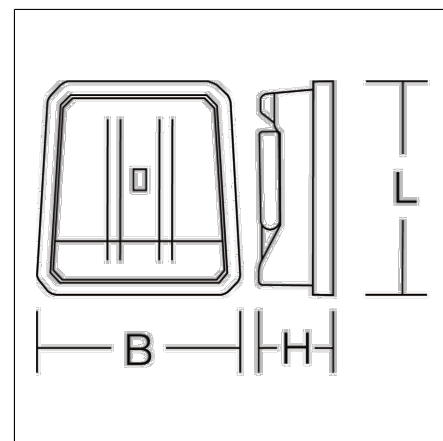

Mobile work light. Impact-resistant and break-proof 2-component plastic housing. Edge protection and handle with soft plastic (thermoplastic elastomer - TPE). Cover opal, made of impact- and break-resistant plastic (polycarbonate). Uniform, soft and glare-reduced illumination thanks to multi-LED technology, opal cover and large light emission surface. Adjustable light direction with plastic bracket (ABS). Three socket outlets on the back side allow the connection of additional luminaires or electrical devices. Ergonomically placed switch. Heavy rubber power supply cable H07RN-F for high mechanical loads with mains plug. Extensive accessories optionally available (tripods, mounting rails, magnetic holders, etc.). Luminaire with limited surface temperature in accordance with EN 60598-2-24.

Product specifications

Length L	320 mm
Width B	305 mm
Height H	110 mm
Weight	2.8 kg
Steckdosen	3 x Typ E (CEE 7/5)
Supply cable / plug	5 m, H07RN-F, 3 x 1,5 mm ² / Typ E+F (CEE 7/7)
additional functions	with switch
Light source	LED
Colour temperature	5000 K
Rated luminous flux	4700 lm
System power	33 W
System efficiency	142 lm/W
Glare evaluation RUG (4H 8H)	26,2
Beam angle	100°/100°
LED rated life	50000 h (L70/B50)
Colour rendering index (CRI)	80
Colour tolerance (McAdam)	5 SDCM
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	2
Luminaires on B16A fuse	3
Luminaires on C10A fuse	4
Luminaires on C16A fuse	7
Inrush current / Inrush current duration	20 A / 200 µs
CIE Flux Code / CEN Flux Code	51 82 97 100 100
Type of protection	IP 54
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK08 (5 Joule)
Ambient temperature	-20 °C bis + 30 °C
Safety marks	D-mark
Conformity mark	CE

Accessories



95-0008-0001
Tripod 'Standard', without castors, set with mounting rail for 1 work light



95-0005-0001
Tripod 'Standard', without castors, set with mounting rail for 2 work lights



95-0003-0001
Tripod 'Standard', without castors




95-0061-0001
Tripod 'Profi', 3-part, extendable up to 3.20 m



90-0004-0022
Mounting rail for 1 or 2 work lights



95-0007-0022
Magnetic holder, for attachment 1 or 2 work lights



95-0059-0022
Mounting plate, for 2 mounting rails



95-0290-0006
Transport bag for work light



95-0009-0001
Tripod 'Standard', with castors, set with mounting rail for 1 work light



95-0006-0001
Tripod 'Standard', with castors, set with mounting rail for 2 work lights



95-0004-0001
Tripod 'Standard', with castors



90-0005-0022.1
Mounting rail for 1 work light, for tripod and wall mounting



95-0021-0014
Fixing device for scaffolding, with mounting rail for 1 work light



95-0013-0022.2
Magnetic holder, for attachment 1 work light



95-0310-0022
Multi-adaptor for DIN spigot

