



Tube light

68A45050-0062 | Tube lights

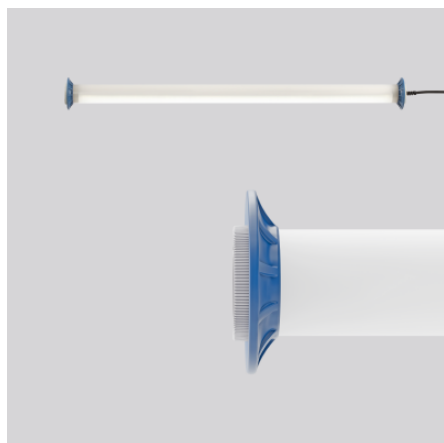

Tube lights
4017506101021
D 120, L 1245

Ceiling mounting, pendant, Wall (surface)
grey

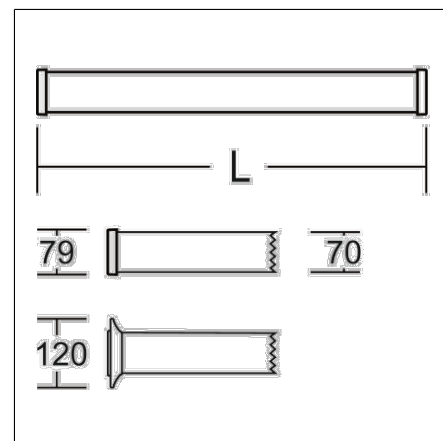

Protection tube plastic (polycarbonate) opal, shockproof. End caps made of plastic (polyamide) grey. Protectors made of soft plastic at the ends for protection during mobile use. Uniform, soft and glare-reduced illumination. Electronic ballast included. Heavy rubber power supply cable H07RN-F for high mechanical loads with mains plug. Suitable for wall, ceiling and pendant mounting due to accessories (optional). Mounting set must be ordered separately. Luminaire with limited surface temperature in accordance with EN 60598-2-24.

Product specifications

| | |
|--|--|
| Length L | 1245 mm |
| Diameter D | 120 mm |
| Weight | 3.34 kg |
| Light source | LED |
| Colour temperature | 5000 K |
| Rated luminous flux | 6650 lm |
| System power | 47 W |
| System efficiency | 141 lm/W |
| Glare evaluation RUG (4H 8H) | 26,8 |
| Beam angle | down 139°/104° up 180°/78° |
| LED rated life | 50000 h (L90/B50) |
| Colour rendering index (CRI) | 80 |
| Colour tolerance (McAdam) | 3 SDCM |
| Photobiological safety according to EN 62471 | Risk group 0 |
| Driver | Converter |
| Control | on/off |
| Voltage | 24 V / 50 Hz |
| CIE Flux Code / CEN Flux Code | 41 70 89 88 100 |
| Type of protection | IP 67 |
| Protection class | III |
| Filament test | 850°C - 30 seconds |
| Impact resistance | IK08 |
| Ambient temperature | -20 °C bis + 40 °C |
| Safety marks | D-mark |
| Conformity mark | CE |
| Supply cable / plug | 5 m, H07RN-F, 2 x 1,5 mm² / CEE 24VAC 16A 2p |
| Type of protection | IP 67 |

Accessories



68Z00001
Mounting bracket (plastic) (set = 2 pieces)



68Z00002
Mounting bracket (metal) with magnet (set = 2 pieces)

Tube light

68A45050-0062 | Tube lights




68Z00003
Mounting bracket (plastic) with magnet (Set = 2 pieces)



68Z00004
Mounting bracket (metal) with hanger assembly of stainless steel (set = 2 pieces)



68Z00006
Mounting bracket (metal) with expander suspension (L 600 mm), set (2 pcs.)



68Z00005
Mounting bracket (metal) with adjustable belt suspension (L 330-550 mm), set (2 pcs.)



68Z00007
Magnetic holder, mounting bracket (plastic) with rubberised magnet, set (2 pieces)



68Z00016
Mounting bracket (plastic) with key ring, rotatable luminaire, set (2 pcs.)



68Z00017
Mounting bracket (plastic) with expander suspension (L 600 mm), rotatable luminaire, set (2 pcs.)



68Z00008
Mounting bracket (plastic) with adjustable belt suspension (L 330-550 mm), rotatable luminaire, set (2 pcs.)

Tube light

68A45050-0062 | Tube lights

