


PRODUCT-DETAILS

CAL4-11K

CAL4-11K Auxiliary Contact Block

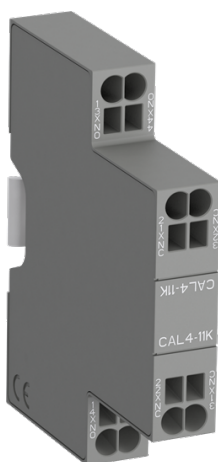

Informations générales

Extension du type de produit	CAL4-11K
Code de produit	1SBN010134R1011
EAN	3471523131262
Description courte	CAL4-11K Auxiliary Contact Block
Description longue	CAL4-11K is a 2-pole side mounted auxiliary contact block equipped with Push-In Spring terminals and can be fitted on AF(C)09(Z)(B)...96 contactors and NF(C)(Z)(B) contactor relays. CAL4 auxiliary contact block can be clipped onto the right- and/or left-hand side of the contactors or the contactor relays and bears the corresponding function marking. CAL4-11K is available with 1 N.O. and 1 N.C. instantaneous contacts for standard industrial environments. With the Push-in Spring terminals, one push is all you need for a faster than ever installation, an easier than ever wiring and a reliable as ever connection.

Commande

Quantité minimum	1 pièce
Code douanier	85389099
Groupe de produit	Accessories for Block Contactors

Downloads Préférés

Instructions et manuels	1SBC101054M6801
CAD Dimensional Drawing	2CDC001079B0201

Dimensions

Produit Largeur Net	12 mm
Produit Longueur Net	60 mm
Produit Hauteur Net	72 mm
Poids net	0.03 kg

Technique

Connecting Capacity Auxiliary Circuit	Flexible with Ferrule 1/2x 0.5 ... 2.5 mm ² Flexible with Insulated Ferrule 1/2x 0.5 ... 1.5 mm ² Flexible 1/2x 0.5 ... 2.5 mm ² Rigid Solid 1/2x 1 ... 2.5 mm ²
Maximum Electrical Switching Frequency	(AC-15) 1200 cycles per hour (DC-13) 900 cycles per hour
Maximum Mechanical Switching Frequency	3600 cycles per hour
Mounted Auxiliary Contacts	1 NO, 1 NC
Type de montage	Side Mounting
Number of Auxiliary Contacts NC	1
Number of Auxiliary Contacts NO	1
Nombre de pôles	2
Fréquence assignée (f)	Circuit auxiliaire 50 / 60 Hz
Tension assignée de tenue aux chocs (U _{imp})	6 kV
Tension assignée d'isolement (U _i)	acc. to IEC 60947-5-1 690 V acc. to UL/CSA 600 V
Courant assignée d'emploi AC-15 (I _e)	(500 V) 2 A (690 V) 2 A (24 / 127 V) 6 A (220 / 240 V) 4 A (400 / 440 V) 3 A
Courant assignée d'emploi DC-13 (I _e)	(24 V) 6 A / 144 W (48 V) 2.8 A / 134 W (72 V) 1 A / 72 W (110 V) 0.55 A / 60 W (125 V) 0.55 A / 69 W (220 V) 0.27 A / 60 W (250 V) 0.27 A / 68 W (400 V) 0.15 A / 60 W (500 V) 0.13 A / 65 W (600 V) 0.1 A / 60 W
Tension	Circuit auxiliaire 690 V
Courant assigné de courte durée admissible (I _{cw})	for 0.1 s 140 A for 1 s 100 A
Normes et standards	IEC/EN 60947-5-1, UL 60947-5-1, CSA C22.2 No. 60947-5-1-14
Adapté pour	AF09 AF09Z AF12 AF12Z AF16 AF16Z AF26 AF26Z AF30 AF30Z AF38 AF38Z AF40 AF52 AF65 AF80

- AF96
- AFC09
- AFC12
- AFC16
- AFC26
- AFC30
- AFC38
- AF09B
- AF09ZB
- AF12B
- AF12ZB
- AF16B
- AF16ZB
- AF26B
- AF26ZB
- AF30B
- AF30ZB
- AF38B
- AF38ZB
- NF22E
- NFZ22E
- NF31E
- NFZ31E
- NF40E
- NFZ40E
- NF44E
- NFZ44E
- NF53E
- NFZ53E
- NF62E
- NFZ62E
- NF71E
- NFZ71E
- NF80E
- NFZ80E
- NF33/11
- NF51/11
- NFC22E
- NFC31E
- NFC40E
- NFC44E
- NFC53E
- NFC62E
- NFC71E
- NFC80E
- NFC33/11
- NFC51/11
- NFZB22E
- NFB22E
- NFZB31E
- NFB31E
- NFZB40E
- NFB40E
- NFZB44E
- NFB44E
- NFZB62E
- NFB62E
- NFZB80E
- NFB80E

Type de borne	Push-in Spring Terminals
Wire Stripping Length	Auxiliary Circuit 10 mm

Technique UL/CSA

Connecting Capacity Auxiliary Circuit UL/CSA	Rigid Solid 1/2x 18-14 AWG
Pilot Duty UL/CSA	A600 Q600

Environnement

Courant thermique conventionnel à l'air libre (I _{th})	acc. to IEC 60947-5-1, Θ = 40 °C 16 A
--	---------------------------------------

Indice de protection	acc. to IEC 60529, IEC 60947-1, EN 60529 Auxiliary Terminals IP20
----------------------	---

Informations RoHS	2CMT2021-006277
WEEE B2C / B2B	Business To Business
Catégorie DEEE	5. Small Equipment (No External Dimension More Than 50 cm)

Certificats et Déclarations (Numéro de document)

Certificat ABS	ABS_20-2060694-PDA
CB Certificate	CB_SE-93052A1
CQC Certificate	CQC2011010304496319 CQC2019010304264779
Declaration of Conformity - CCC	2020980304001258 2020980304001053
Déclaration de Conformité - CE	1SBD250007U1000
Declaration of Conformity - UKCA	1SBD250038U1000
Certificat DNV	DNV_TAE00001BV-5
Certificat LR	LRS_LR2002723TA-02
Certificat RMRS	RMRS_1802703280
Certificat UL	UL-US-L252354-131-82119002-6 UL-CA-L252354-331-82119002-5

Emballage

Emballage Niveau 1 Unités	bag 1 pièce
Emballage Niveau 1 Largeur	125 mm
Emballage Niveau 1 Longueur	125 mm
Emballage Niveau 1 Hauteur	20 mm
Emballage Niveau 1 Poids	0.03 kg
Emballage Niveau 1 EAN	3471523131262

Classifications

eClass	V11.0 : 27371302
E-Number (Finland)	3708031
E-Number (Sweden)	3210647
ETIM 6	EC000041 - bloc de contact auxiliaire
ETIM 7	EC000041 - Auxiliary contact block
ETIM 8	EC000041 - Auxiliary contact block
ETIM 9	EC000041 - Auxiliary contact block
Code de catégorie granulaire IDÉA (IGCC)	4743 >> Auxiliary contact block
Code de classification d'objet	K
UNSPSC	39121522

Catégories

Produits basse tension → Produits de Contrôle, Protection et sécurité machines → Contacteurs → Block Contactors Accessories

