


HB 710

501050.002 | Oval bulkhead luminaires



Ceiling and wall luminaires
4051859537557
L 207, B 97, H 56

Ceiling mounting, Wall (surface)
white

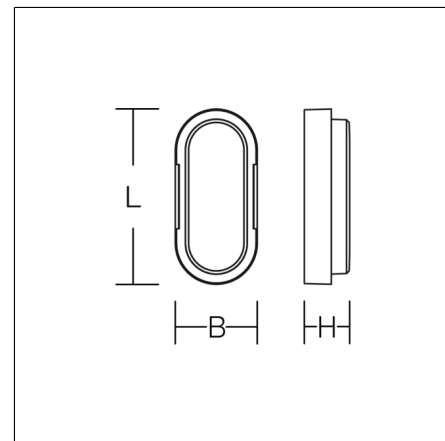

Oval luminaire in classic design. Housing and diffuser: opal, made of shockproof plastic (polycarbonate). Internal fixing points mean no screws are visible. MultiLumen: 2 steps adjustable luminous flux. Factory setting is the highest luminous flux. Simple, tool-free installation using the Plug & Play plug-in system. LED module can be connected without use of tools. Convenient, flexible connection option using 2 rear and 4 lateral cable inlets. Suitable for through-wiring. Luminaire with limited surface temperature in accordance with EN 60598-2-24 for use in environments in which a deposit of non-conductive dust on the luminaire can be expected.

Product specifications

Length L	207 mm
Width B	97 mm
Height H	56 mm
Weight	220 g
Light source	LED
Colour temperature	4000 K
Rated luminous flux	700 lm 1100 lm
System power	6 W 9.5 W
System efficiency	116 lm/W 117 lm/W
Glare evaluation RUG (4H 8H)	25,6 27,2
Beam angle	down 132°/118° up 180°/180°
Rated life	35000 h (L70/B50)
Colour rendering index (CRI)	80
Colour tolerance (McAdam)	4 SDCM
Photobiological safety according to EN 62471	Risk group 0
Driver	Electronic ballast
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	38
Luminaires on B16A fuse	60
Luminaires on C10A fuse	62
Luminaires on C16A fuse	102
Inrush current / Inrush current duration	5.4 A / 160 µs
CIE Flux Code / CEN Flux Code	41 70 90 91 100
Type of protection	IP 54
Protection class	II
Filament test	650°C - 30 seconds
Impact resistance	IK07
Ambient temperature	-30 °C bis + 35 °C
Safety marks	D-mark
Conformity mark	CE, EAC