





NOTICE

DIFFUSEURS MULTIDIRECTIONNELS
DIFMD 160 - DIFMD 200




Encombrement




DIFMD	A	B	C	∅
160	230	250	36,8	148
200	275	300	45,8	189,5

Réglages

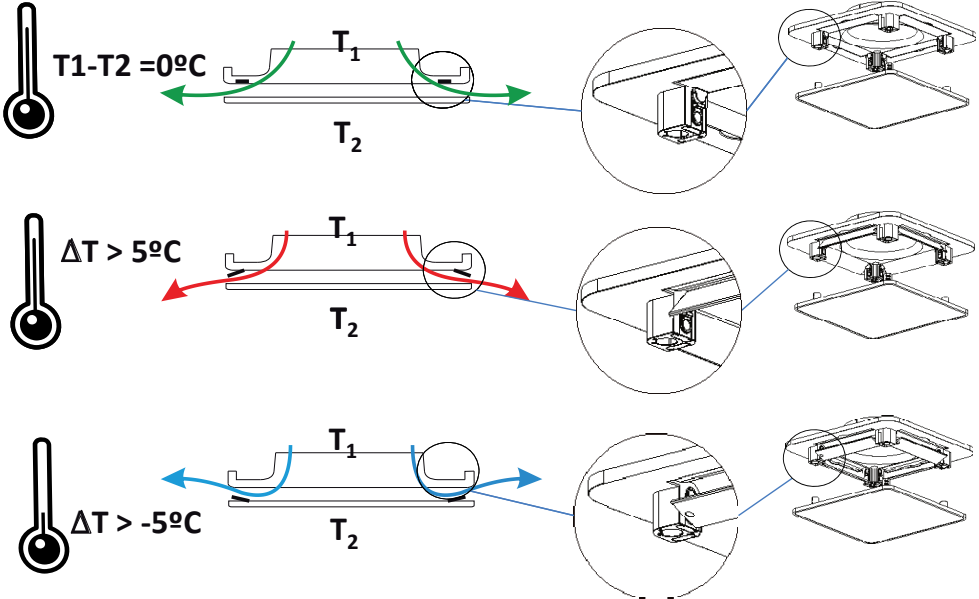

Sens de soufflage

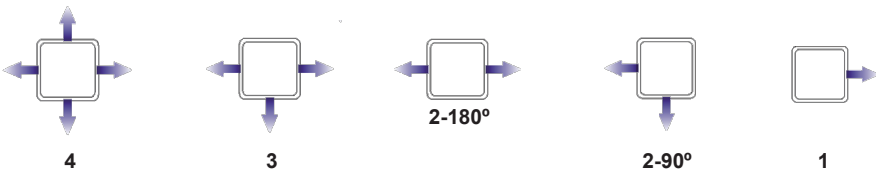

Caractéristiques

DIFMD	Qv (m³/h)										
		DP (Pa)	Lw (dB(A))	DP (Pa)	Lw (dB(A))	DP (Pa)	Lw (dB(A))	DP (Pa)	Lw (dB(A))	DP (Pa)	Lw (dB(A))
160	120	13	<20	9	23	15	21	30	32	-	-
	150	18	24	12	26	18	28	35	37	-	-
	180	26	29	18	32	27	33	50	42	-	-
	200	32	32	22	34	33	37	62	44	-	-
	210	35	33	24	36	36	38	69	46	-	-
	240	45	37	31	40	47	42	91	49	-	-
200	240	30	29	20	28	32	32	59	43	-	-
	270	37	32	24	31	40	36	74	48	-	-
	300	46	36	30	34	50	39	-	-	-	-
	350	63	40	41	39	67	44	-	-	-	-

DIFMD	INSUFFLATION Portée d'air (pour Vt = 0,25 m/s) en montage plafond.				
	Qv (m³/h)	Vk (m/s)	Lt(m) DT = 0°C	Lt(m) DT = -5°C	Lt(m) DT = -10°C
160	120	1,7	2,8	2,3	1,6
	150	2,1	3,7	3,1	2,2
	180	2,5	4,1	3,6	2,6
	200	2,8	4,2	3,8	2,7
	210	2,9	4,5	4,1	2,9
	240	3,3	5	4,7	3,3
200	240	2,1	4,2	3,6	2,5
	270	2,4	4,5	3,9	2,8
	300	2,7	4,7	4,2	3
	350	3,1	4,9	4,5	3,2

Portée

