

Product End of Life Instructions

Living Space Air quality sensor - Protocol - Temp, RH, CO2, VOC,





Potential disassembly risks

⚠ WARNING


HAZARD OF ELECTRIC SHOCK, EXPLOSION, AND FIRE

The Ethernet cable and Ethernet knockout cable that come with the Schneider Energy Monitor package are 600V-rated. If additional Ethernet cables are required they must be Power over Ethernet (PoE) CAT5E 600 V-rated cable (SEMONITORM™ or similar).

Failure to follow these instructions can result in death, serious injury, or equipment damage.



End of Life Instructions

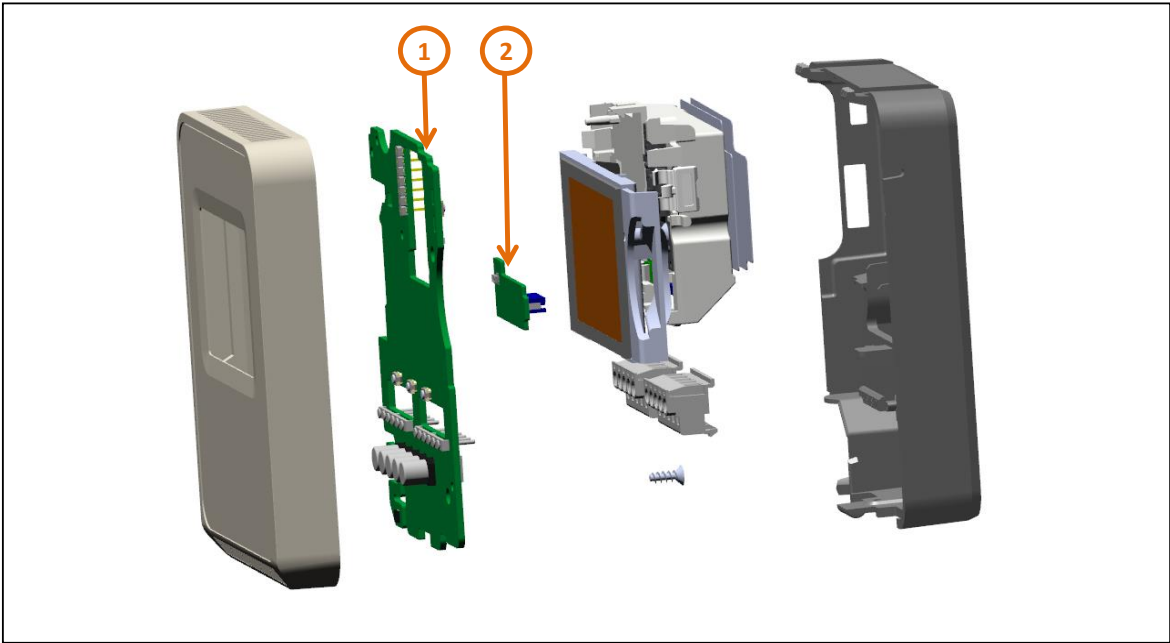

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	PCBA	39.399823	Assy,PCB,LSA,Touch Protocol TRH CO2 VOC
To be depolluted	2	PCBA	1.57729	PCBA, PM ADAPTER, LSA



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The main purpose of the product is to measure different environmental factors such as CO2, temperature, RH humidity, PM, VOC. The input ratings of the product is 30 VDC, or 24 Vac, 2W, Class 2. The product is packed in a polyethylene layer, boxed in cardboard and labelled
Product reference	SLPSTCVP2
Total representative product mass	172.6 g
Representative product dimensions	115mm x 85mm x 33mm
Accessories	No
Date of information release	06-2024



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	No	
Recyclability potential	2%	Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.se.com/contact>
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

www.se.com

ENVEOLI2405010_V1

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

06-2024