




Ceiling and wall luminaires
4051859529774
L 1200, B 46, H 60

Ceiling mounting, Wall (surface)
white

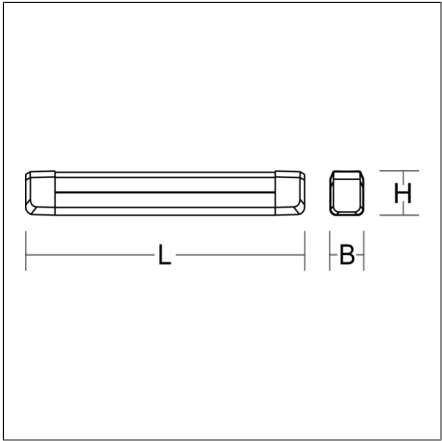

Linear luminaire with timeless functional design. Ideal for sanitary areas, corridors, waiting areas, nursing homes, patient rooms. Body and end caps made of white plastic. Diffuser made of plastic (polycarbonate), opal, shockproof. Homogeneous and smooth light distribution. MultiColour: With rear switching element, variable colour temperature 3000 K or 4000 K. Factory setting is 4000 K. Diffuser can be assembled without the use of tools. Quick and easy to install. Can be installed horizontally and vertically. 2 central cable inlets for looping the cable. Converter integrated and encapsulated.

Product specifications

Length L	1200 mm
Width B	46 mm
Height H	60 mm
Weight	0.9 kg
Light source	LED
Colour temperature	3000 K 4000 K
Rated luminous flux	3000 K: 2100 lm 4000 K: 2200 lm
System power	3000 K: 19 W 4000 K: 19 W
System efficiency	3000 K: 111 lm/W 4000 K: 116 lm/W
Glare evaluation RUG (4H 8H)	3000 K: 23,6 4000 K: 23,8
Beam angle	down 144°/106° up 180°/180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance (McAdam)	4 SDCM
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	9
Luminaires on B16A fuse	14
Luminaires on C10A fuse	15
Luminaires on C16A fuse	25
Inrush current / Inrush current duration	22.8 A / 200 µs
CIE Flux Code / CEN Flux Code	40 69 88 82 100
Type of protection	IP 40 ceiling mounting IP 44 wall mounting
Protection class	II
Filament test	650°C - 30 seconds
Impact resistance	IK07
Ambient temperature	-30 °C bis + 40 °C
Conformity mark	CE, EAC