# Product End of Life Instructions


#### **EVlink eWallbox AC Metal 22kwT2S MIDnBEVMNX**







### **End of Life Instructions**

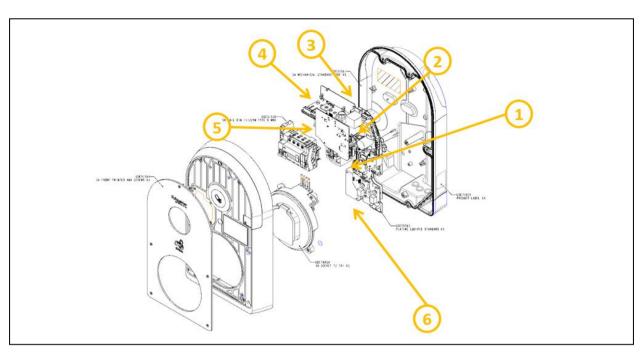

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Electronic Board (Communication) > 10cm <sup>2</sup>	26g	PCBA(JYT19210)
To be depolluted	2	Electronic Board (Communication) > 10cm <sup>2</sup>	325.28g	PCBA(MFR67543)
To be depolluted	3	Electrolyte capacitors which size: height > 25 mm, diameter > 25 mm or proportionately similar volume	25g	Aluminum electrolyte capacitors
To be depolluted	4	Electronic Board (Communication) > 10cm <sup>2</sup>	127.22g	PCBA(MFR78468)
To be depolluted	5	Electronic Board (Communication) > 10cm <sup>2</sup>	296.1g	PCBA(MFR71605)
To be depolluted	6	Other battery	2.5g	Coin-type Lithium Battery



## Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	The EVlink Pro AC charging station provides highly reliable, flexible, and sustainable smart charging with reinforced safety to maximize uptime, ensuring a seamless user experience for drivers and installers for semi-public parking facilities in commercial and industrial buildings, corporate EV fleets and apartment blocks. Easy to install, operate, monitor, and maintain through digital capabilities and reinforced safety.
Product reference	EVB3S22N40MR
Additional similar product references	EVB3S22N40MR
Total representative product mass	7684 g
Representative product dimensions	530mm x 317mm x 152mm
Accessories	Pedestal, Cable locker, TIC communication card, Metal kit
Date of information release	12-2024

## (I) Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.		
In case of special transportation: transportation method	No		
Recyclability potential	The recyclability rate was calculated from the recycling rates of each material making up the product based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (09 recyclability).		

Schneider Electric Industries SAS
Country Customer Care Center
http://www.se.com/contact
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €

ENVEOLI2203022\_V2

www.se.com

Published by Schneider Electric

© 2023 - Schneider Electric - All rights reserved

12-2024