

Alcor

LED Flood Light

Product Features

- High height indoor / outdoor LED projector with symmetrical light distribution
- High system efficiency up to 125 lm/W in 3000K
- IP65 and IK08 protection rate
- Wide choice of outgoing flows up to 25,000 lm
- Meets the requirements of the ULOR of 27 Dec 2018 (CCT <3000K)
- 5 year warranty, L80B10 @Ta 25°C is 100,000 hours
- Ambient temperature -30 to 50 °C and surge protection 10KV.
- Reliable quality, manufacture capability, and global logistics by Delta Group 50-year establishment

Applications

Parking

Building Illumination

Projector/Projection


Outdoor illuminating




	LSHD04EFLS6530-AS	LSHD04EFLS6630-AS	LSHD04EFLS6730-AS	LSHD04EFLS6830-AS
Type of Product	Industrial Application			
Product variation (mm)	293.6*236.9*47.1	352.3*280.2*55.3	435.4*319.5*60.9	493.7*366.3*62.7
Lumen Output (Im)	5750	12500	18750	25000
Input Voltage (V)	AC220/240V 50/60Hz			
Power (W)	50	100	150	200
Efficacy (Im/W)	115	125	125	125
CRI (Ra)	>80			
CCT (K)	3000K (Other CCT Available: 4000K, 5000K, 6500K)			
Power Factor	> 0.9			
Operating Temp (°C)	-30°C to 50°C			
Lifetime	100,000 Hrs L80/B10			
Protection	IP65/IK08			
Warranty	5 years			
Beam Angle	90° x 150°			
Weight (kg)	1.6	2.2	3.6	5
Dimensions (mm)	236.9	280.2	310.5	366.3
Optional	Pole mounting adaptor			

Remarks

All values are based on 3000K CRI80 and in $+25\,^{\circ}\mathrm{C}$ ambient temperature, luminous flux tolerance +-5%, output power tolerance +-5%.

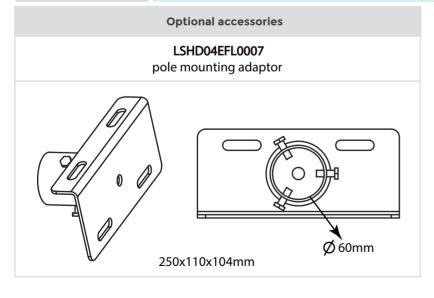



Specifications are subject to change without notice.

20211013

Delta Electronics Netherlands B.V.

Zandsteen 15

2132 MZ Hoofddorp, The Netherlands

TEL: +31-20-655-0900 FAX: +31-20-655-0999 For more product information and sales inquiries, please contact sleu@deltaww.com

www.delta-emea.com/ledlighting