




Large-area lights
4017506127168
L 884, B 225, H 495

portable
silver, metallic

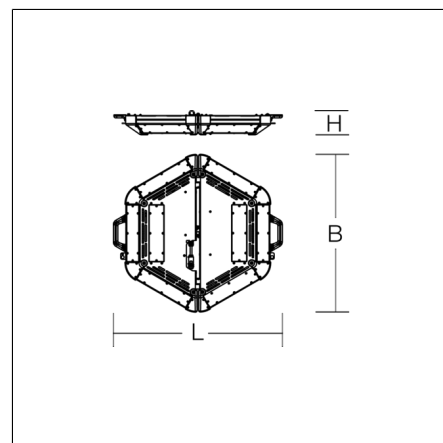

Large area luminaire. Housing: aluminium, powder-coated. Corners protected by plastic caps. High-efficiency LED units with optimum light control thanks to clear plastic (PC) lens optics. Can be used folded on the floor, unfolded on a tripod or hanging. Dimmable with potentiometer. Incl. adapter for spigot mounting (d=30 mm, DIN 14640) with the option of straight or 30° inclined mounting. Incl. cover to protect and hold the supply cable during transport.

Product specifications

Length L	884 mm
Width B	225 mm
Height H	495 mm
Weight	20.4 kg
Supply cable / plug	10 m, H07BQ-F, 3 x 1,5 mm ² / Typ E+F (CEE 7/7)
additional functions	with switch
Light source	LED
Colour temperature	5000 K
Rated luminous flux	102200 lm
System power	775 W
System efficiency	132 lm/W
Glare evaluation RUG (4H 8H)	31,9
Beam angle	79°/91°
LED rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance (McAdam)	3 SDCM
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	1-10 V, analogue
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B16A fuse	1
Luminaires on C16A fuse	1
Inrush current / Inrush current duration	70 A / 1800 µs
CIE Flux Code / CEN Flux Code	55 83 96 99 100
Type of protection	IP 65
Protection class	I
Filament test	650 °C
Impact resistance	IK08 (5 Joule)
Ambient temperature	-20 °C bis + 35 °C
Conformity mark	CE

Accessories



95-0060-0014.D
Crank tripod 'Premium', Hmax 3,80 m, Hmin 1,74m



95-0294-0014
Crank tripod 'Lightmaxx', Hmax 4,13 m, Hmin 1,75 m



95-0265-0040
Carrier box for telescopic tripod 'Premium', wood, 2 carrier handles



95-0267-0001
Bracing set, 3x rope cord and peg



95-80C300-0004
Power supply cable for POWERCASE L, not dimmable, CEE 7/7 (Type E+F), IPx4



95-80C400-0004
Power supply cable for POWERCASE L, dimmable, CEE 7/7 (Type E+F), IPx4



95-80C500-0004
Power supply cable for POWERCASE L, separately dimmable on both sides, CEE 7/7 (Type E+F), IPx4



95-80CB00-0004
Power supply cable for POWERCASE L, Bluetooth, CEE 7/7 (Type E+F), IPx4



95-0060-0014S1
Crank tripod 'Premium', incl. Tripod adapter d=30 mm (DIN 14640), bracing set and carrier box



95-0254-0014
Tripod adapter, 28 mm / 30 mm (DIN 14640)



95-0266-0001
Rubberized joint feet for Crank tripod 'Premium' (Set 3x)



95-0227-0001
Belt strap incl. snap hook (set = 2 pieces), for suspended mounting



95-80C301-0004
Power supply cable for POWERCASE L, not dimmable, CEE 7/7 (Type E+F), IP68



95-80C401-0004
Power supply cable for POWERCASE L, dimmable, CEE 7/7 (Type E+F), IP68



95-80C501-0004
Power supply cable for POWERCASE L, separately dimmable on both sides, CEE 7/7 (Type E+F), IP68



95-80CB01-0004
Power supply cable for POWERCASE L, Bluetooth, CEE 7/7 (Type E+F), IP68

