




GE Lighting

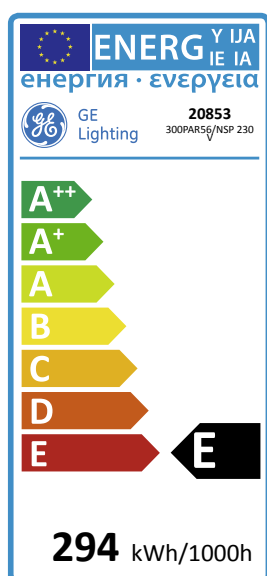

294
kWh/1000h

E
energy class

12
lumens/watt

PAR 56 300PAR56/NSP 230V 20853

Product information

PAR lamps provide a robust and flexible design solution for a wide range of applications. Choice of PAR36, PAR46, PAR56 or PAR64

- 3000 K or 4200 K colour temperature
- Choice of beam widths
- Excellent colour rendering
- High efficiency combined with low operating costs
- Robust and reliable
- UV control
- Easy retrofit
- Colour consistent throughout life
- Colour blends with halogen and fluorescent

Application areas



Club and Disco



WORLDWIDE PARTNER

Product data

Cap/Base	G16d
Bulb Shape	PAR
Bulb Finish	Aluminized
Bulb Diameter [mm]	177.8
Maximum Overall Length [mm]	127
Net weight per piece [g]	625
Gross weight per piece [g]	695
Brand	General Electric (GE)

Performance data

Nominal correlated colour temperature (CCT) [K]	2750
Nominal beam angle [°]	19
Nominal center beam candlepower (CBCP) [cd]	40000
Nominal lumens [lm]	3450
Energy efficiency class (EEC)	E
Rated Life [h]	2000
Weighted energy consumption [kWh/1000h]	293.19

Electrical data

Nominal power [W]	300
Nominal lamp voltage [V]	230
Coil type	CC-13

Logistic data

DUN Code	43168208536
EAN Code	43168208536
Pack Quantity	12
Layer quantity	132 UK
Layer quantity UK	132
Pallet quantity UK (PC)	264
Outer case size	349 x 300 x 446 (mm)

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

Disclaimer

Special purpose lamp – Stage Studio. Not suitable for household illumination.