




GE  
Lighting

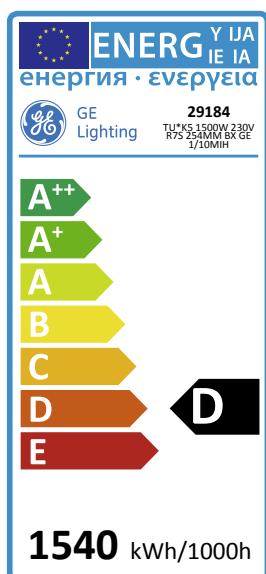

1540  
kWh/1000h

D  
energy class

21  
lumens/watt

## Halogen Linear High Watt

TU\*K5 1500W 230V R7S 254MM BX GE  
1/10MIH

# 29184

### Product information

Housing in a clear quartz bulb, these halogen floodlighting lamps have a ceramic one-pin cap on each end and can be operated on 230V or 240V mains. Linear halogen lamps provide a powerful light source for compact fittings used for floodlighting, architectural lighting and security. GE's linear halogen lamps are double ended, using the universal R7s cap format, and are available in the two industry standards of 118mm or 78mm, plus longer, higher wattage versions.

### Application areas



Hospitality



Home



## Product data

|                             |                       |
|-----------------------------|-----------------------|
| Cap/Base                    | R7s                   |
| Bulb Shape                  | Tubular               |
| Bulb Diameter [mm]          | 10                    |
| Maximum Overall Length [mm] | 255.5                 |
| Net weight per piece [g]    | 20                    |
| Gross weight per piece [g]  | 41                    |
| Brand                       | General Electric (GE) |

## Performance data

|   |          |
|---|----------|
| Colour Rendering Index (CRI) [Ra]               | 100      |
| Nominal correlated colour temperature (CCT) [K] | 3000     |
| Nominal lumens [lm]                             | 32000    |
| Rated efficacy [lm/W]                           | 21.33333 |
| Energy efficiency class (EEC)                   | D        |
| Lamp Lumen Maintenance factor (2000 hours)      | 80%      |
| Rated Life [h]                                  | 2000     |
| Weighted energy consumption [kWh/1000h]         | 1539.4   |

## Electrical data

|   |         |
|---|---------|
| Nominal power [W]                           | 1500    |
| Rated power [W]                             | 1500    |
| Nominal lamp voltage [V]                    | 230     |
| Starting time (sec)                         | 0.0 s   |
| Warm up time up to 60% of full light output | instant |
| Number of switching cycles                  | 8000    |
| Coil type                                   | C-8     |
| Dimming Capability                          | Yes     |

## Logistic data

|                          |                     |
|--------------------------|---------------------|
| DUN Code                 | 39004102291849      |
| EAN Code                 | 9004102291848       |
| Pack Quantity            | 10                  |
| Layer quantity           | 180 EUR, 240 UK     |
| Layer quantity EUR       | 180                 |
| Layer quantity UK        | 240                 |
| Pallet quantity EUR (PC) | 2520                |
| Pallet quantity UK (PC)  | 4080                |
| Outer case size          | 381 x 124 x 60 (mm) |

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Halogen Lamps Spectrum Catalogue \(PDF\)](#)

[Halogen DEQ and IR™ DEQ Lamps Data sheet \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)