



GE
Lighting



102
kWh/1000h

D
energy class

PAR 30

OT*Q100PAR30 230V E27 30DEG BX GE
1/15

32484

Product information

Halogen PAR lamps are a range of direct replacement for standard incandescent reflector lamps. They run on mains voltage, so you no longer need transformers or extra wiring to enjoy the crisp white light of halogen.


Application areas



Hospitality



Home

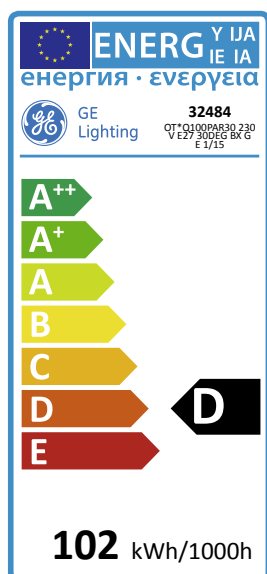

Product data

Cap/Base	E27
Bulb Shape	PAR
Bulb Diameter [mm]	97
Maximum Overall Length [mm]	88
Net weight per piece [g]	241
Gross weight per piece [g]	268
Brand	General Electric (GE)

Performance data

Colour Rendering Index (CRI) [Ra]	100
Nominal correlated colour temperature (CCT) [K]	2900
Nominal beam angle [°]	30
Rated beam angle [°]	30
Nominal center beam candlepower (CBCP) [cd]	3100
Rated peak intensity in [Cd]	3100
Rated Lumens [lm]	980
Energy efficiency class (EEC)	D
Lamp Lumen Maintenance factor (2000 hours)	80%
Rated Life [h]	3000
Nominal Lifetime [h]	3000
Weighted energy consumption [kWh/1000h]	101.8

Electrical data

Nominal power [W]	100
Rated power [W]	100
Nominal lamp power factor	1
Nominal lamp voltage [V]	230
Starting time (sec)	0.0 s
Warm up time up to 60% of full light output	instant
Number of switching cycles	12000
Coil type	CC-8
Dimming Capability	Yes

Logistic data

DUN Code	5021731324840
EAN Code	5021731324840
Pack Quantity	15
Layer quantity	1 UK
Layer quantity UK	1
Pallet quantity EUR (PC)	1520
Pallet quantity UK (PC)	1680
Outer case size	400 x 240 x 140 (mm)

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Halogen Lamps Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)