




GE
Lighting

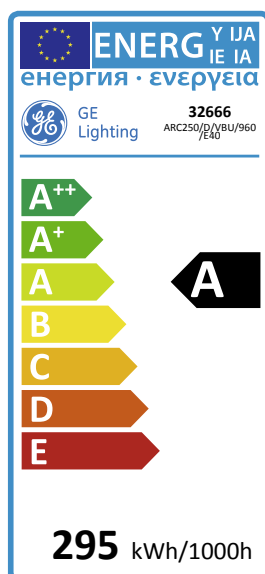

295
kWh/1000h

A
energy class

68
lumens/watt

Arcstream™ Elliptical Diffuse

ARC250/D/VBU/960/E40

32666

Product information

High brightness, high quality white light with good colour rendition and energy efficiency makes GE Metal Halide lamps suitable for many commercial and industrial interiors, particularly in high ceiling areas.

Application areas



Office



Industrial



Car park



Commercial areas



Product data

Cap/Base	E40
Bulb Shape	Elliptical
Bulb Finish	Diffuse
Maximum Overall Length [mm]	227
Net weight per piece [g]	150
Gross weight per piece [g]	201
Operating position	VBU - Vert Base Up
Mercury Content [mg]	13.574
UV radiance	Exempt
Brand	General Electric (GE)

Performance data

Colour Code	960
Colour Rendering Index (CRI) [Ra]	90
Nominal correlated colour temperature (CCT) [K]	6000
Nominal lumens [lm]	17000
Rated Lumens [lm]	17080
Nominal efficacy [LpW]	68
Rated efficacy [LpW]	63.8
Energy efficiency class (EEC)	A
Weighted energy consumption [kWh/1000h]	294.71


Electrical data

Nominal power [W]	250
Rated power [W]	267.9
Nominal lamp voltage [V]	100
Lamp Current [A]	3
Design Ambient Temperature [°C]	25
Run-up time (sec)	270
Hot restart time (sec)	420
Ballast Required	Yes


Logistic data

DUN Code	19004102326660
EAN Code	9004102326663
Pack Quantity	12
Layer quantity	96 EUR, 120 UK
Layer quantity EUR	96
Layer quantity UK	120
Pallet quantity EUR (PC)	384
Pallet quantity UK (PC)	480
Outer case size	391 x 295 x 255 (mm)

Lumen maintenance data

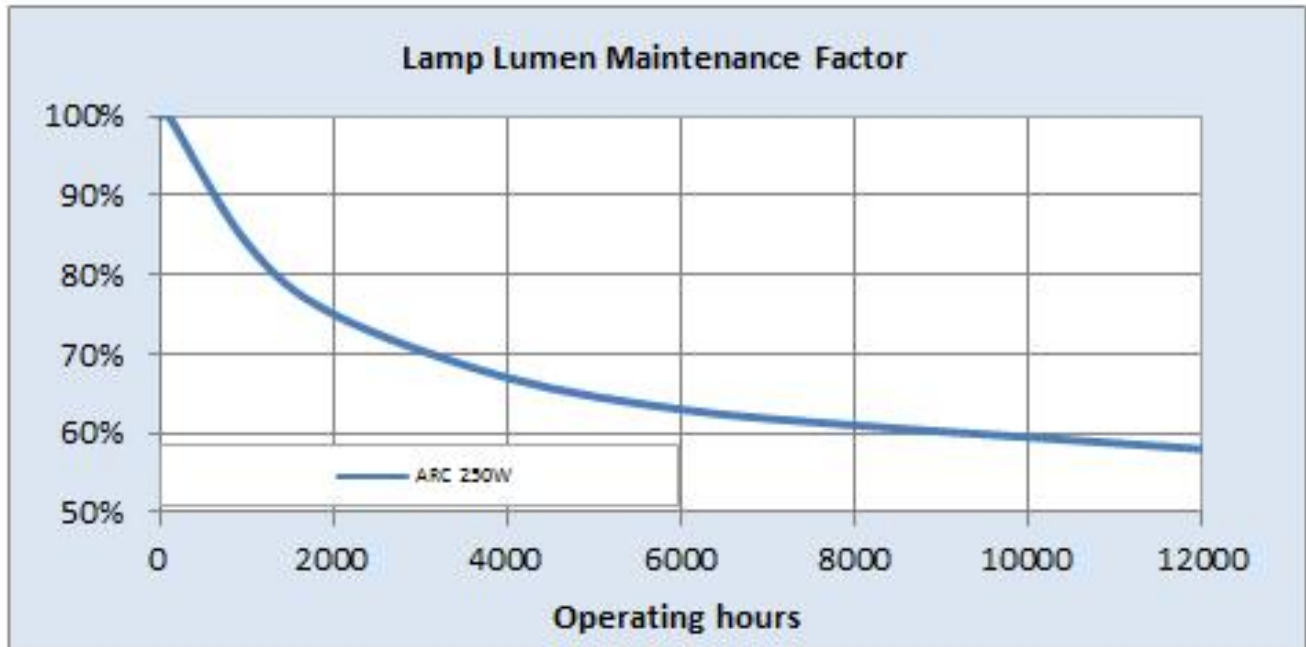

Survival data

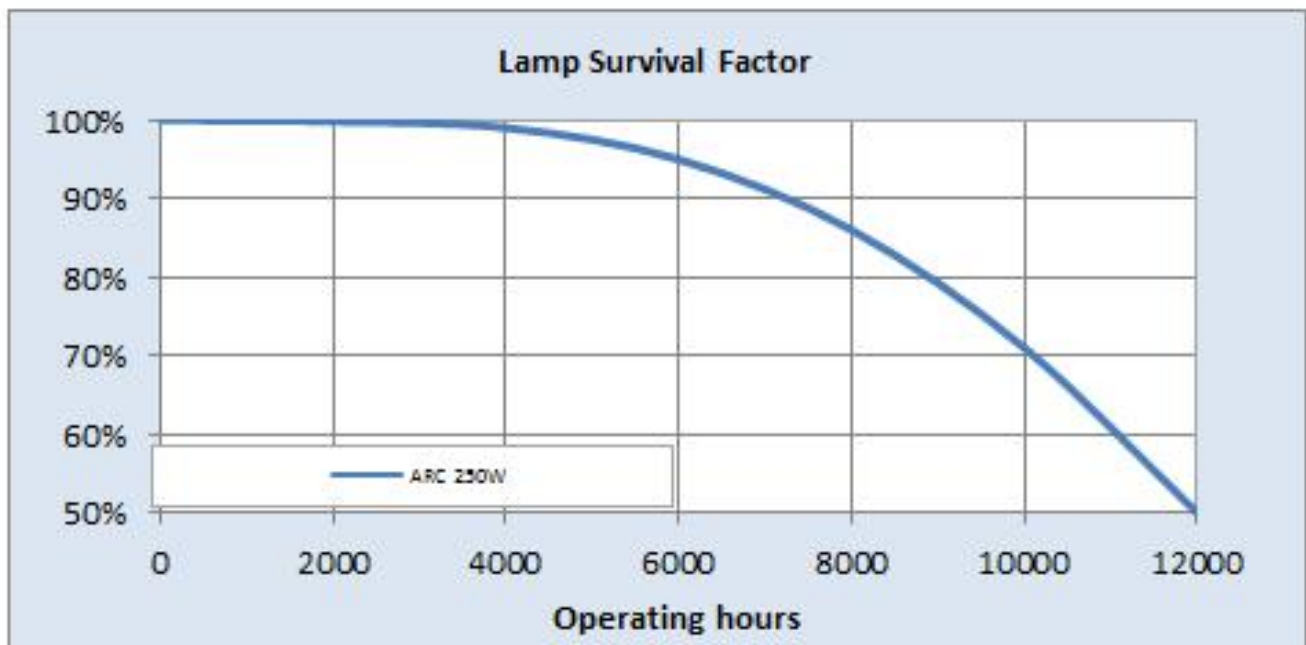

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[HID Lamps Spectrum Catalogue \(EN\) \(PDF\)](#)

[Arcstream™ Tubular, Elliptical Data sheet \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)