


DIMENSIONS (mm) :

Nominal dimensions: 600 x 38

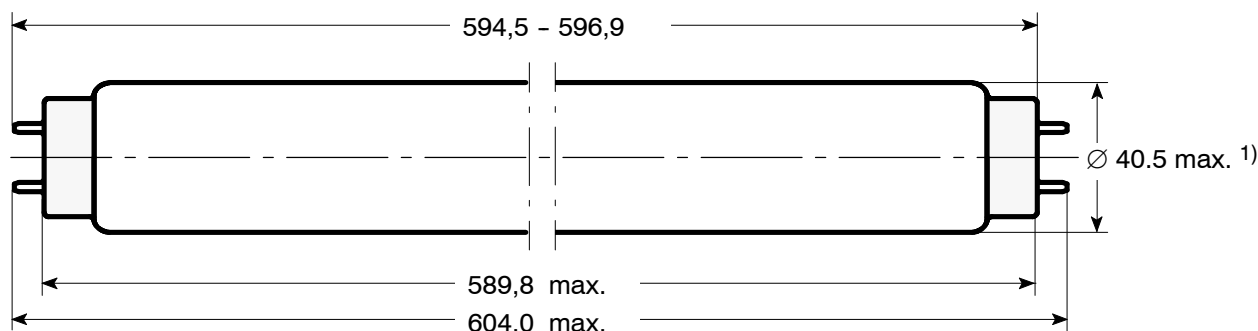

Cap: G13 (IEC61-1 sheet 7004-51-7)

¹⁾ The maximum measure for the diameter includes out of round of the bulb and eccentricity versus the lamp axis.

ELECTRICAL DATA

		NOMINAL VALUE	MIN.	MAX.
Frequency	(Hz) :	50		
Lamp nominal wattage	(W) :	40		
Lamp rated wattage	(W) :	40.0	37.5	42.5
Lamp operating voltage	(V) :	47.0	40.0	54.0
Lamp current	(mA) :	880		
Preheat current	(mA) :	1320		

OPERATING CONDITIONS

		NOMINAL VALUE	MIN.	MAX.
Lamp ambient temperature	(°C) :		-20	
Cap rim temperature	(°C) :			125
Ballast	(Ω/V) :	-		
Starter	110V operation	FS 22, COP 22		
	230/240V operation	FS 11, COP 11		
Burning position	:	any		

LAMP LIFE *

Average life (50% failure rate)	(h) :	10 000
Individual life	(h) :	4 000

RADIATION DATA:

Radiation peak at 365 nm

COLOUR	No.	UV-A irradiance 1m distance bare lamp (315-400nm) (μW/cm ²)	UV-B irradiance 1m distance bare lamp (280-315nm) (μW/cm ²)	ILCOS-Code
BLACKLIGHT QUANTUM				
average at 0 h		85,0	0,10	XUV/FD40-E-G13-38/590

ATTENTION:

This UV energy source emits UV radiation. Avoid exposure to skin and eyes.
Lamps comply with the requirements of EN 60081 and EN 61195, respectively.
Starter and ballast must comply with EN 60155 and EN 60921, respectively.
* Life test according to EN 60081, Annex C.

Issued by : Havells Sylvania
Date : 18.01.2011
Revision Date :


DATA SHEET

Specification No.: 51P-6422
Supersedes :
Page 1 of 2



F40W/T12/2FT/BL QUANTUM

A) Spectral Irradiance vs. Wavelength

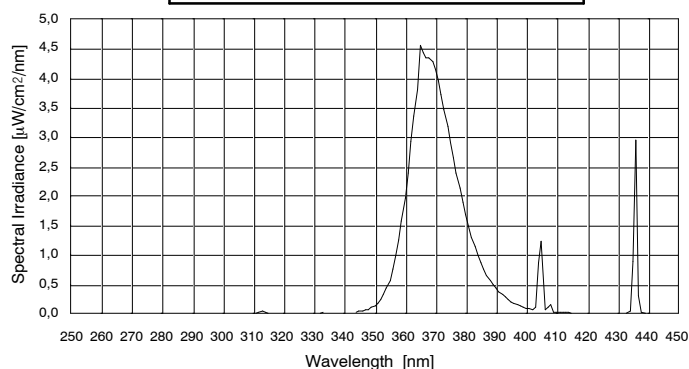

Spectral Irradiance @ 1m distance


UVA = 85,00 μW/cm²
 UVB = 0,10 μW/cm²
 UVB/UVA = 0,12 %
 Wavelength range acc. to CIE
 UVA : 315 - 400 nm
 UVB : 280 - 315 nm

Lamp parameter:

Voltage: 47,0 V
 Current: 0,880 A
 Power: 40,0 W

B) UV Action Curve vs. Wavelength

Proposal of the British Committee to amend EN 60335-2-59 :1997: Insect killers

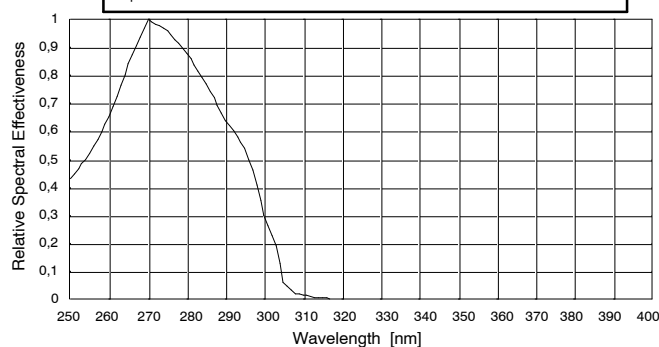


Acc. to EN 60335-2-59 : 1997
 CLC/TC61(GB)579

Total Effective Irradiance @ 1m distance
 Max. 1 mW/m²

Reason: to ensure that the ICNIRP 8 hour effective radiant exposure limit for the eyes and skin of 30 J/m² is not exceeded

C) Total Effective Irradiance vs. Wavelength
 = A) x B)

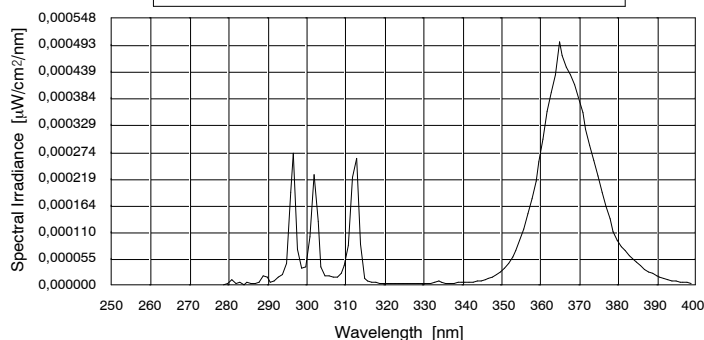

Total Effective Irradiance @ 1m distance
 0,100 mW/m²

ATTENTION:

This UV energy source emits UV radiation. Avoid exposure to skin and eyes. Lamps comply with the requirements of EN 60081 and EN 61195, respectively. Starter and ballast must comply with EN 60155 and EN 60921, respectively.
 * Life test according to EN 60081, Annex C.

Issued by : Havells Sylvania
 Date : 18.01.2011
 Revision Date :

DATA SHEET

Specification No.: 51P-6422
 Supersedes :
 Page 2 of 2