


Photoelectrics Level Sensors Types VP, Modulated



- Sensor for liquid level detection
- Built-in amplifier, Ga-As diode
- Output: Transistor NPN/PNP, NO or NC switching
- High chemical resistance to most acids and bases
- VP01/03/23: Output OFF when sensor in liquid
- VP02/04/24: Output ON when sensor in liquid
- No electrical or thermal connection between liquid and electrical circuit
- LED-indication for output ON
- Power supply 10 to 40 VDC

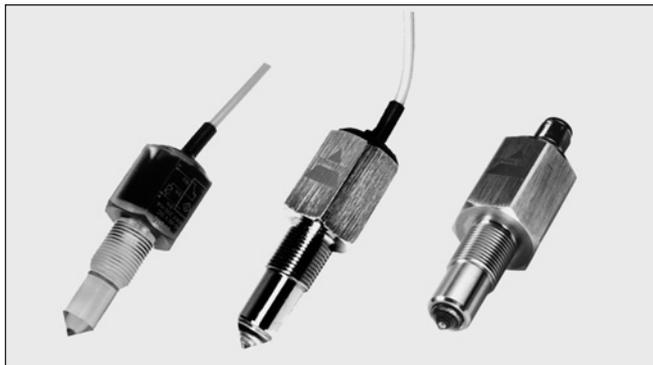


Product Description

Optical level sensor with modulated, infrared light for the detection of liquids. Fitted with built-in amplifier. Transmitter and receiver are completely self-contained in solid plastic designed for mounting into container wall.

VP01/02 are available in a Polysulfone housing resistant to most acids and bases. VP03/04EM are available in a Polyamide 12 housing resistant to various solvents. VP23/24 are available in a stainless steel housing.

Ordering Key

VP 2 2 E P M - 1

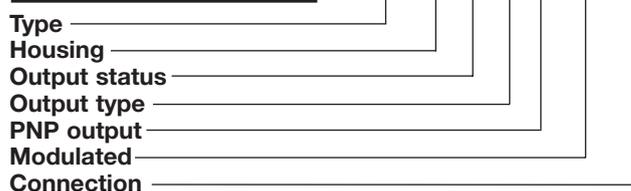




Type Selection

Housing material	Connection	Ordering no. Transistor NPN Make switching	Ordering no. Transistor NPN Break switching	Ordering no. Transistor PNP Make switching	Ordering no. Transistor PNP Break switching
Polysulphone	Cable	VP 02 EM	VP 01 EM	VP 02 EPM	VP 01 EPM
Polyamide 12	Cable	VP 04 EM	VP 03 EM	VP 04 EPM	VP 03 EPM
Nickel-plated brass	Cable			VP 22 EPM	
Nickel-plated brass	Plug			VP 22 EPM-1	
Stainless steel	Cable	VP 24 EM	VP 23 EM	VP 24 EPM	VP 23 EPM

Specifications

Rated operational voltage	10 - 40 VDC	Tip material	VP01/02/22 Polysulphone VP03/04/23/24 Polyamide 12
Rated operational current Continuous	200 mA	Weight	VP0x 90 g VP2x 190 g
Voltage drop	≤ 1.0 VDC	Connection	Cable PVC, 2 m Ø4,1 mm, 3 x 0,25 mm ² Plug (-1) M12 x 1 Cable for plug (-1) CON.1-... series
No-load supply current	≤ 7 mA	Pressure	VP0x 10 bar at + 60°C VP2x 10 bar at + 80°C
Sensing accuracy Liquid level difference	Horizontal mounting: ± 5 mm Vertical mounting: ± 2.5 mm	Pipe thread	3/8" PT
Ambient light	0 - 50.000 lux		
Frequency of operating cycles (f)	30 Hz		
Environment Degree of protection Operating temperature Storage temperature	IP 67 -20° to +80°C (-4° to +176°F) -40° to +100°C (-40° to +100°F)		
Indication for output status	LED, yellow		
Housing material VP01/02 VP03/04 VP23/24 VP22	Polysulphone Polyamide 12 Stainless steel (AISI 304) Nickel-plated brass		

Dimensions

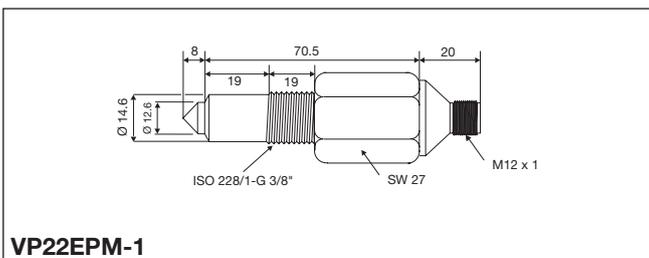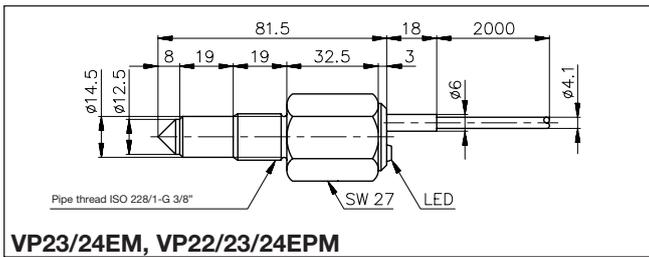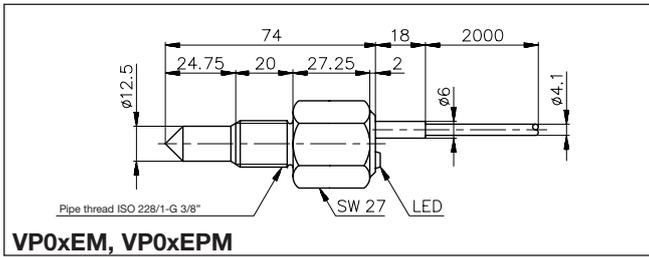


Mode of Operation

The sensor contains IR transmitter, receiver and amplifier with transistor output. The light source is a Ga-As diode emitting infrared light in short pulses.


The conical tip of the sensor forms an angle of 90°C. This angle acts as a prism, i.e. the beam, emitted from the Ga-As diode placed in one side of the sensor head, is reflected internally to the phototransistor placed in the other side of the sensor head, provided

that the tip of the sensor is situated in free air. If the sensor tip is immersed in a liquid, always having a refractive index different from air, the beam will not be refracted by the prism and the photo transistor will not receive any signal.

The sensor types can operate in oil, waste water, aqueous solutions such as beer, wine, alcohol etc. without any kind of accessory.

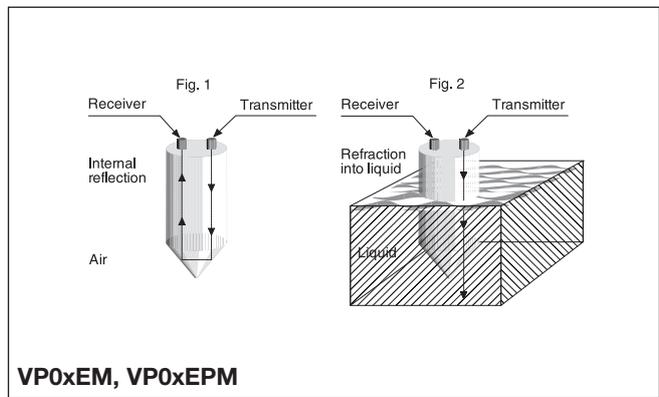

Wiring Diagrams

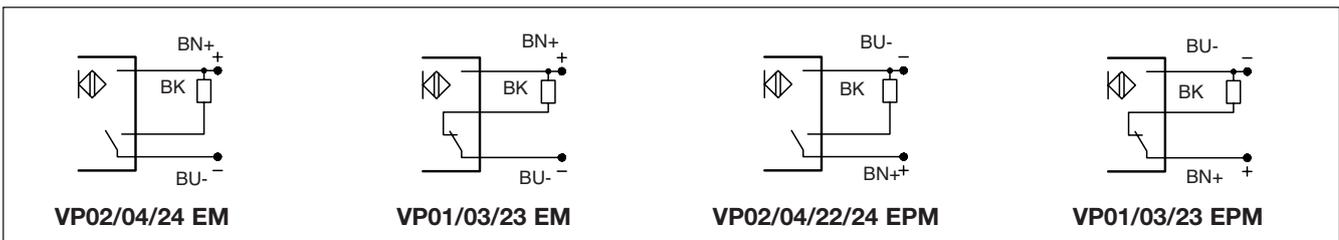

Installation Hints

