

STG cable drum unwinders

Adjustable: single unwinder for all cable drums

Can be dismantled: easy to transport between sites

- Can be dismantled into four elements
- Adjustable according to the diameter (3 positions for the rear tensioner)
- Adjustable in width by moving the clamps
- Polyurethane tensioner: good adherence of cable drums, even when strapped
- Blockage system of the front reel in order to remove the cable drum easily
- Length of bars: 1,000 mm



STG 1500

- For drums Ø 500 to 1.400 mm
- Maximum width 950 mm
- Weight 28 kg
- Elevations of each clamp:
L 130 x W 860 x H 110 mm



STG 2500

- For drums Ø 500 to 1.650 mm
- Maximum width 950 mm
- Weight 38 kg
- Dimensions of each clamp:
L 160 x W 990 x H 105 mm



Code E3004250




ST cable drum unwinder vehicles

Both trolley and unwinder

- Very flexible unwinding thanks to the aluminum centering devices (78 mm Ø), which rotate around a steel shaft
- An additional shaft + 2 centering pin set, supplied with the device, can be ordered in order to preequip other drums and therefore make the loading process faster (**code E3008030**)

- Optional measuring devices:
- M3C for cables with a maximum Ø of 22 mm (**code E3350001**)
- M35C for cables with a maximum Ø of 35 mm (**code E3350352**)

ST1

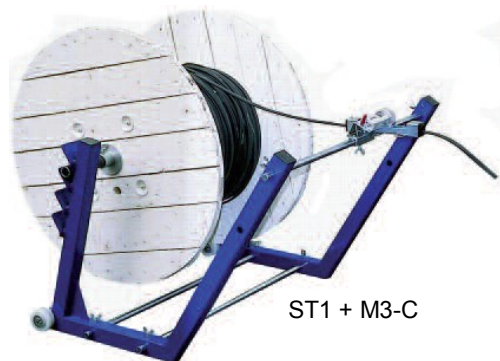

ST1 + M3-C



Allows a single person to load, move...

... and unwind a drum



ST2



ST2



Model	For drums		Chassis dimensions	Total weight	Code
	Diameter	Maximum weight			
ST1	400 to 1.050 mm	300 kg	l 87 x W 1.150 x H 680 mm	31 kg	E3008010
ST2	900 to 1.400 mm	450 kg	l 87 x W 1.150 x H 950 mm	34 kg	E3008020