


Model	CR1216		
System	Manganese dioxide—Li/Organic Electrolyte		
Nominal Voltage (V)	3		
Nominal Capacity (mAh)*	25		
Nominal Discharge Current (mA)	0.1		
Temperature Ranges (deg. C)	min.	max.	
Operating	-20	+85	
Weight (g)**	0.6		
Dimensions (mm)**			
Diameter	12.5		
Height	1.6		
Negative Cap Diameter	8.6		
UL Recognition	MH12568 (N)		

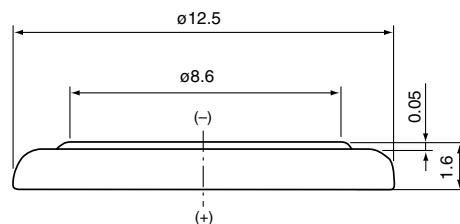


Available Terminals and Wire Connectors


None, bulk only.

Characteristics


● Discharge Characteristics

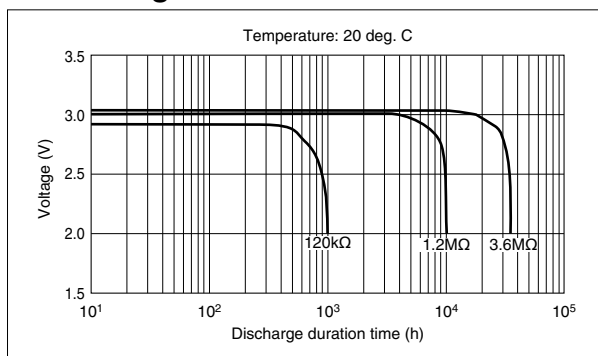


● Temperature Characteristics

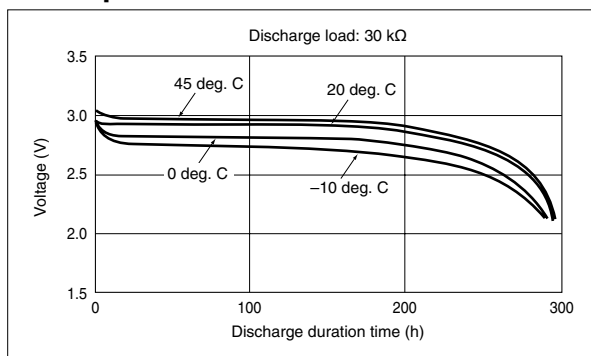

● Pulse Discharge Characteristics

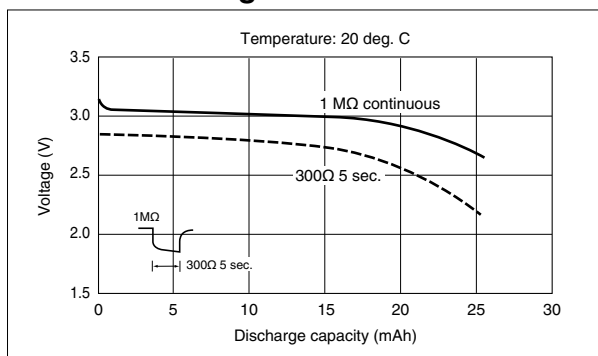

● Relationship between Discharge Current and Discharge Capacity

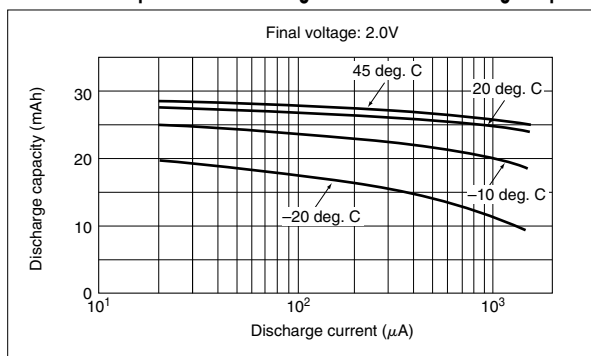

* Nominal capacity indicates duration until the voltage drops down to 2.0V when discharged at a nominal discharge current at 20 deg. C.

** Dimensions and weight are for the battery itself, but may vary depending on the shape of terminals or other factors.