

INSTRUCTION




04-2017

RZB
LIGHTING

Mega Kugel

611877.0031

IP 65 IK02
 220 - 240 V / 50 - 60 Hz
 3 x 2,5 mm²
 2,50 mm²

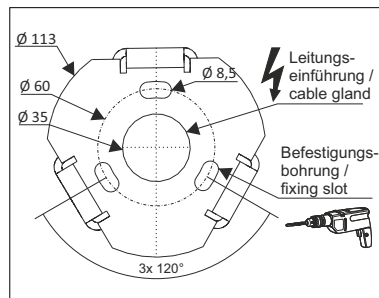

611877.0031

D 300, H 600

LED

10 W

4,04 kg

Φ

EEK_{LED}

EEK

CRI

CCT


710 lm

A+

A+

85

3000K




17

27

28

45

27 A



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464











EN 12464



EN 12464
Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de

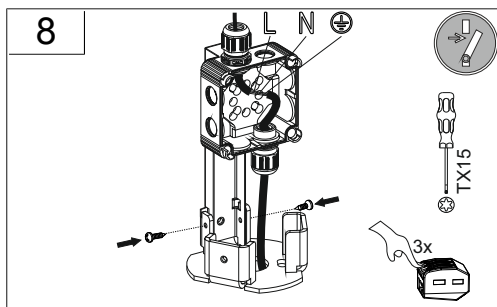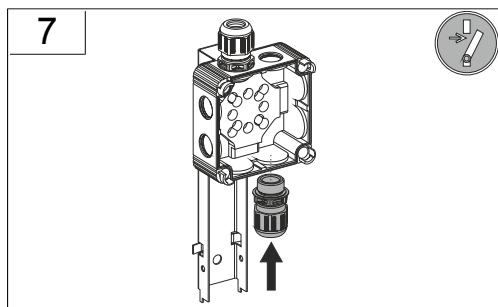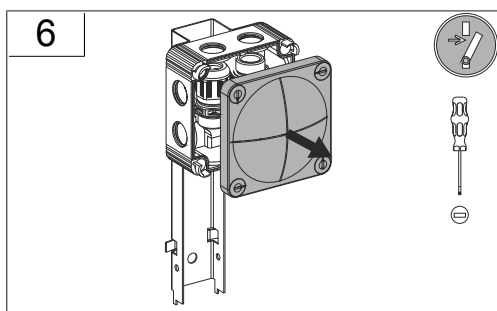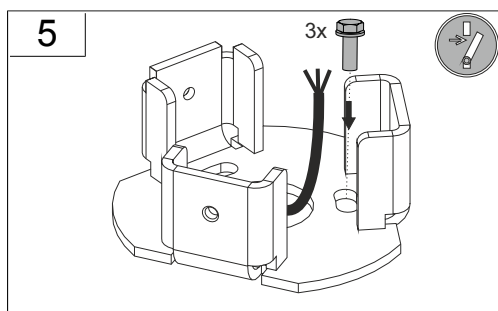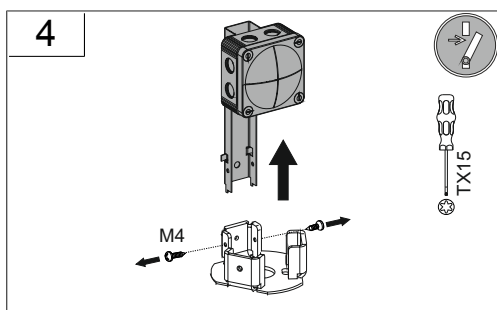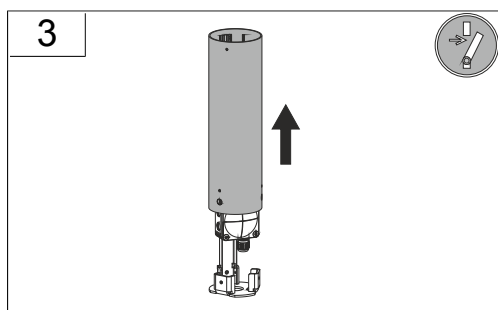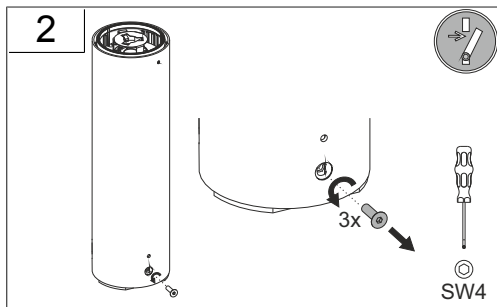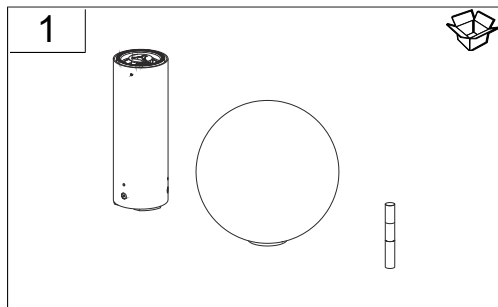





9




10




11

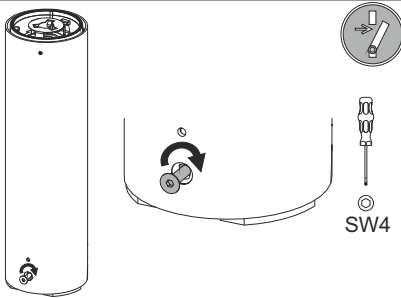


12




13



14

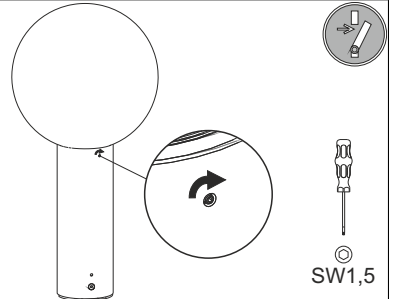

15





a

DIN 4844




Vor Wartung oder Reparatur freischalten/
power off before maintenance or repair

b



Temperatur / temperature
=> -20 °C - +35 °C

Indoor & Outdoor

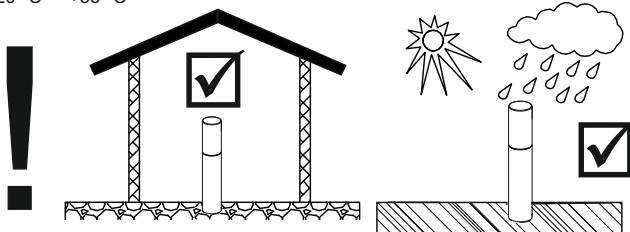

 +  			
	982103.000	D 115, H 401	1,15 kg

   			
	982110.002	Ersatzglas D 300, H 301	1,75 kg

Instruction:



04-2017



Instruction:



04-2017



Instruction:



04-2017

