



Tube light

68A25050-0062 | Tube lights

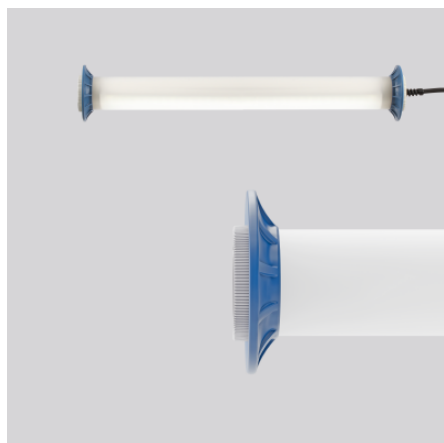

Tube lights
4017506100963
D 120, L 750

Ceiling mounting, pendant, Wall (surface)
grey

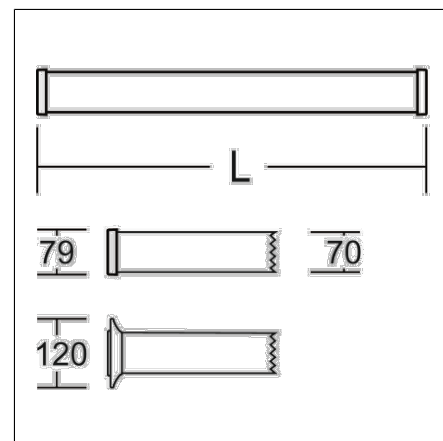

Protection tube plastic (polycarbonate) opal, shockproof. End caps made of plastic (polyamide) grey. Protectors made of soft plastic at the ends for protection during mobile use. Uniform, soft and glare-reduced illumination. Electronic ballast included. Heavy rubber power supply cable H07RN-F for high mechanical loads with mains plug. Suitable for wall, ceiling and pendant mounting due to accessories (optional). Mounting set must be ordered separately. Luminaire with limited surface temperature in accordance with EN 60598-2-24.

Product specifications

Length L	750 mm
Diameter D	120 mm
Weight	2.22 kg
Light source	LED
Colour temperature	5000 K
Rated luminous flux	3200 lm
System power	21 W
System efficiency	152 lm/W
Glare evaluation RUG (4H 8H)	26,6
Beam angle	down 139°/104° up 180°/78°
LED rated life	50000 h (L90/B50)
Colour rendering index (CRI)	80
Colour tolerance (McAdam)	3 SDCM
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter
Control	on/off
Voltage	24 V / 50 Hz
CIE Flux Code / CEN Flux Code	41 70 89 88 100
Type of protection	IP 67
Protection class	III
Filament test	850°C - 30 seconds
Impact resistance	IK08
Ambient temperature	-20 °C bis + 40 °C
Safety marks	D-mark
Conformity mark	CE
Supply cable / plug	5 m, H07RN-F, 2 x 1,5 mm² / CEE 24VAC 16A 2p
Type of protection	IP 67

Accessories



68Z00001
Mounting bracket (plastic) (set = 2 pieces)



68Z00002
Mounting bracket (metal) with magnet (set = 2 pieces)

Tube light

68A25050-0062 | Tube lights



68Z00003
Mounting bracket (plastic) with magnet (Set = 2 pieces)



68Z00004
Mounting bracket (metal) with hanger assembly of stainless steel (set = 2 pieces)



68Z00006
Mounting bracket (metal) with expander suspension (L 600 mm), set (2 pcs.)



68Z00005
Mounting bracket (metal) with adjustable belt suspension (L 330-550 mm), set (2 pcs.)



68Z00007
Magnetic holder, mounting bracket (plastic) with rubberised magnet, set (2 pieces)



68Z00016
Mounting bracket (plastic) with with key ring, rotatable luminaire, set (2 pcs.)



68Z00017
Mounting bracket (plastic) with expander suspension (L 600 mm), rotatable luminaire, set (2 pcs.)



68Z00008
Mounting bracket (plastic) with adjustable belt suspension (L 330-550 mm), rotatable luminaire, set (2 pcs.)

Tube light

68A25050-0062 | Tube lights

